

SPECTACLE BLINDS PADDLE BLINDS & PADDLE SPACERS



A DBM GLOBAL COMPANY

AITKENMFG.COM
SALES@AITKENMFG.COM
O: (281) 441-5438
F: (713) 699-5186

BREAKING THE MOLD

For over 80 years Aitken has partnered with clients to engineer and manufacture equipment solutions for their critical projects. Having earned trust from some of industry's iconic brands, it is our experience, expertise and willingness to challenge the norm that helps our clients, big and small, thrive.

Our team is crafted with people that drive innovation by thinking without limits. This allows us to be highly responsive to evolving needs throughout a project, manage tight fabrication schedules and maintain quality control timing to deliver products on time.

KEY PRODUCT CATEGORIES

Over the years, we have become known for working alongside our clients in helping to clearly identify the challenge so our engineering department can design custom solutions. When a more standardized product is needed, our catalogue offers a wide range of products that service heavy industrial industries. Products are available in carbon steel and most alloys ranging in size up to 72" and beyond.

- Plate Products
- Flow Products
- Pressure Vessels
- Metering Products

AREAS OF EXPERTISE



Engineering Design

Inhouse PE and application engineers with direct experience with parts



Customization

Solution-focused designs



Specialty welding

450+ welding procedures for ferrous and exotic metals



Material Sourcing

Domestic and international



Fabrication

Advanced FEA and CFD capabilities



Field Installation

Access to 1,000+ craft labor for larger installs



A DBM GLOBAL COMPANY

CERTIFICATIONS



Plate Products

GENERAL INFORMATION

Aitken plate product thicknesses are based on ASME B16.48 specifications. In July 1993 the American Society of Mechanical Engineers (ASME) B16 committee gave to its Subcommittee C the assignment to convert the API 590 steel line blanks standard into an ASME standard.

The American Petroleum Institute no longer publishes the API 590 standard. Pressure-temperature ratings are those listed in ASME B16.5 for the material groups corresponding to the listed materials in Table 1A and shall include material restrictions cited in notes of Table 2.

Tolerances are tied to the appropriate code specifications unless otherwise noted.

Ring joint dimensions and tolerances are in strict accordance with ANSI B16.5 and B16.20. Octagonal ring is furnished as standard on male ring joint plate products unless oval ring is specified at time of order.

For paddle spacers, the hole diameter in the handle is 1/2" for 1" wide handles, and 3/4" for 1 1/2" wide handles.

ASME B16.48 prohibits the use of indicator or bolt holes in the handles of paddle blanks.

One coat of standard shop primer will be applied to all carbon steel plate products unless otherwise specified.

Standard materials are:

- ASTM A516 GR 70
- 304 stainless steel
- 316 stainless steel

Other alloys can be furnished upon request.

Standard finishes are:

- Mill Finish (MF): Some scale may be apparent
- Serrated Finish (SF): 125-250 AARH (3.2 - 6.3 Ra)


Aitken plate products are produced in strict accordance with the following codes of practice:

- ASME B16.48
- ANSI B16.5
- ANSI B16.20
- ASME B16.47 (for larger diameter flanges)

Weights are for carbon steel components.

Class 150
Raised/
Flat Face

ASME
B16.48

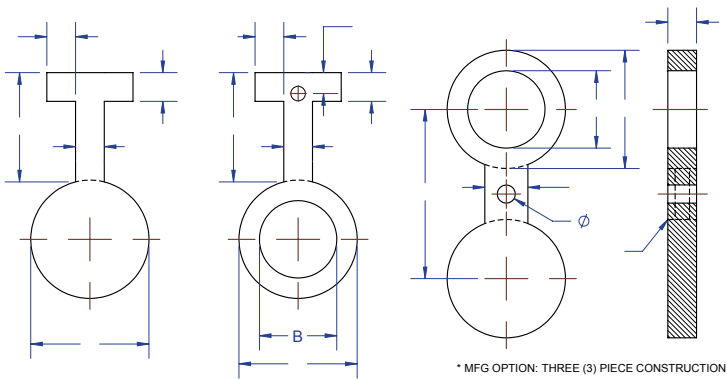

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)								WT (LBS)		
	A	B	C	T	L	W1	W2	Ø	1	1A	2
1/2"	1.75"	0.62"	2.38"	*0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
3/4"	2.12"	0.82"	2.75"	*0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
1"	2.50"	1.05"	3.12"	*0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
1 1/4"	2.88"	1.66"	3.50"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
1 1/2"	3.25"	1.90"	3.88"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	2
2"	4.00"	2.38"	4.75"	0.25"	4.00"	1.00"	2.00"	N/A	2	1	2
2 1/2"	4.75"	2.88"	5.50"	0.25"	4.00"	1.00"	2.00"	N/A	2	2	3
3"	5.25"	3.50"	6.00"	0.25"	4.00"	1.00"	2.50"	N/A	2	2	3
3 1/2"	6.25"	4.00"	7.00"	0.38"	4.00"	1.00"	2.50"	0.75"	4	3	6
4"	6.75"	4.50"	7.50"	0.38"	4.00"	1.00"	2.50"	0.75"	5	3	7
5"	7.62"	5.56"	8.50"	0.38"	4.00"	1.00"	3.00"	0.875"	6	3	8
6"	8.62"	6.62"	9.50"	0.50"	4.00"	1.00"	3.00"	0.875"	9	4	13
8"	10.88"	8.62"	11.75"	0.50"	4.00"	1.00"	3.00"	0.875"	14	6	19
10"	13.25"	10.75"	14.25"	0.62"	5.00"	1.00"	4.00"	1.00"	26	10	34
12"	16.00"	12.75"	17.00"	0.75"	5.00"	1.50"	4.00"	1.00"	45	18	60
14"	17.62"	14.00"	18.75"	0.75"	5.00"	1.50"	4.25"	1.125"	54	21	73
16"	20.12"	16.00"	21.25"	0.88"	5.00"	1.50"	4.25"	1.125"	81	31	110
18"	21.50"	18.00"	22.75"	1.00"	5.00"	1.50"	4.50"	1.25"	106	33	136
20"	23.75"	20.00"	25.00"	1.12"	5.00"	1.50"	4.75"	1.25"	144	44	185
24"	28.12"	24.00"	29.50"	1.25"	5.00"	1.50"	5.50"	1.375"	223	63	283

WT=Approximate Weight


*Thickness exceeds ASME B16.48 requirements.

SIZE	RATING/FACING	TYPE	MATERIAL	GASKET SURFACE
1/2-24	150#	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	MF=Mill Finish SF=Serrated Finish 125-250 AARH (3.2 - 6.3 Ra) X=Other



Class 300
Raised/
Flat Face

ASME
B16.48

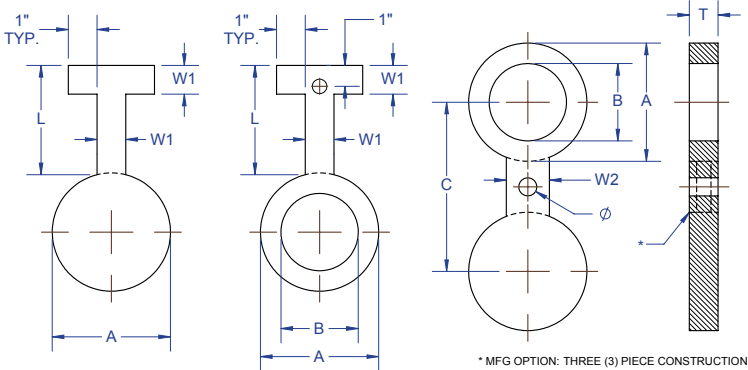

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)								WT (LBS)		
	A	B	C	T	L	W1	W2	Ø	1	1A	2
1/2"	2.00"	0.62"	2.62"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
3/4"	2.50"	0.82"	3.25"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
1"	2.75"	1.05"	3.50"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
1 1/4"	3.12"	1.66"	3.88"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	2
1 1/2"	3.62"	1.90"	4.50"	0.25"	4.00"	1.00"	1.50"	N/A	2	1	2
2"	4.25"	2.38"	5.00"	0.38"	4.00"	1.00"	2.00"	0.75"	2	2	3
2 1/2"	5.00"	2.88"	5.88"	0.38"	4.00"	1.00"	2.00"	0.875"	3	2	4
3"	5.75"	3.50"	6.62"	0.38"	4.00"	1.00"	2.50"	0.875"	4	3	5
3 1/2"	6.38"	4.00"	7.25"	0.50"	4.00"	1.00"	2.50"	0.875"	6	4	8
4"	7.00"	4.50"	7.88"	0.50"	4.00"	1.00"	2.50"	0.875"	7	4	9
5"	8.38"	5.56"	9.25"	0.62"	4.00"	1.00"	3.00"	0.875"	11	7	16
6"	9.75"	6.62"	10.62"	0.62"	4.00"	1.00"	3.00"	0.875"	14	8	21
8"	12.00"	8.62"	13.00"	0.88"	4.00"	1.00"	3.00"	1.00"	30	15	43
10"	14.12"	10.75"	15.25"	1.00"	5.00"	1.00"	4.00"	1.125"	46	21	65
12"	16.50"	12.75"	17.75"	1.12"	5.00"	1.50"	4.00"	1.25"	71	30	98
14"	19.00"	14.00"	20.25"	1.25"	5.00"	1.50"	4.25"	1.25"	104	49	149
16"	21.12"	16.00"	22.50"	1.50"	5.00"	1.50"	4.25"	1.375"	153	67	216
18"	23.38"	18.00"	24.75"	1.62"	5.00"	1.50"	4.50"	1.375"	202	84	282
20"	25.62"	20.00"	27.00"	1.75"	6.00"	1.50"	4.75"	1.375"	261	105	360
24"	30.38"	24.00"	32.00"	2.00"	6.00"	1.50"	5.50"	1.625"	417	160	571


WT=Approximate Weight



SIZE	RATING/FACING	TYPE	MATERIAL	GASKET SURFACE
1/2-24	300#	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	MF=Mill Finish SF=Serrated Finish 125-250 AARH (3.2 - 6.3 Ra) X=Other

Class 600
Raised/
Flat Face

ASME
B16.48

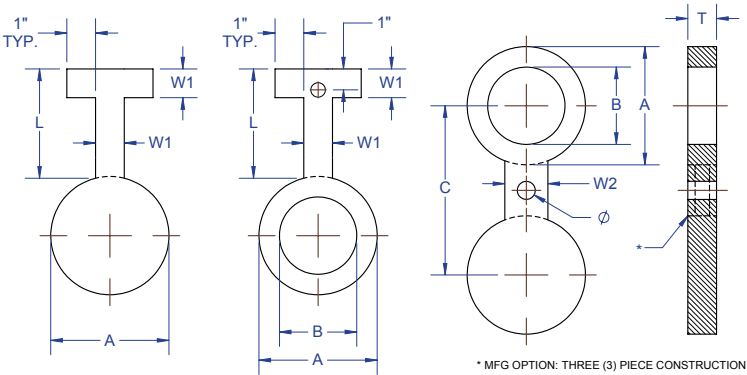

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)								WT (LBS)		
	A	B	C	T	L	W1	W2	Ø	1	1A	2
1/2"	2.00"	0.62"	2.62"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
3/4"	2.50"	0.82"	3.25"	0.25"	4.00"	1.00"	1.50"	N/A	1	1	1
1"	2.75"	1.05"	3.50"	0.25"	4.00"	1.00"	2.25"	0.75"	1	1	1
1 1/4"	3.12"	1.44"	3.88"	0.38"	4.00"	1.00"	2.25"	0.75"	2	2	2
1 1/2"	3.62"	1.68"	4.50"	0.38"	4.00"	1.00"	2.62"	0.875"	2	2	3
2"	4.25"	2.16"	5.00"	0.38"	4.00"	1.00"	2.25"	0.75"	2	2	3
2 1/2"	5.00"	2.64"	5.88"	0.50"	4.00"	1.00"	2.62"	0.875"	4	3	6
3"	5.75"	3.26"	6.62"	0.50"	4.00"	1.00"	2.62"	0.875"	5	4	7
3 1/2"	6.25"	3.76"	7.25"	0.62"	4.00"	1.00"	3.00"	1.00"	7	5	10
4"	7.50"	4.26"	8.50"	0.62"	4.00"	1.00"	3.00"	1.00"	9	6	14
5"	9.38"	5.30"	10.50"	0.75"	4.00"	1.00"	3.38"	1.125"	16	11	26
6"	10.38"	6.36"	11.50"	0.88"	5.00"	1.00"	3.38"	1.125"	23	15	36
8"	12.50"	8.33"	13.75"	1.12"	5.00"	1.00"	3.75"	1.25"	41	24	63
10"	15.62"	10.42"	17.00"	1.38"	5.00"	1.50"	4.12"	1.375"	78	45	119
12"	17.88"	12.39"	19.25"	1.62"	5.00"	1.50"	4.12"	1.375"	119	64	178
14"	19.25"	13.62"	20.75"	1.75"	5.00"	1.50"	4.50"	1.50"	149	76	220
16"	22.12"	15.62"	23.75"	2.00"	6.00"	1.50"	4.88"	1.625"	224	115	332
18"	24.00"	17.62"	25.75"	2.12"	6.00"	1.50"	5.25"	1.75"	278	131	403
20"	26.75"	19.56"	28.50"	2.50"	6.00"	1.50"	5.25"	1.75"	405	192	591
24"	31.00"	23.50"	33.00"	2.88"	6.00"	1.50"	6.00"	2.00"	623	270	887


WT=Approximate Weight



SIZE	RATING/FACING	TYPE	MATERIAL	GASKET SURFACE
1/2-24	600#	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	MF=Mill Finish SF=Serrated Finish 125-250 AARH (3.2 - 6.3 Ra) X=Other

Class 900
Raised/
Flat Face

ASME
B16.48

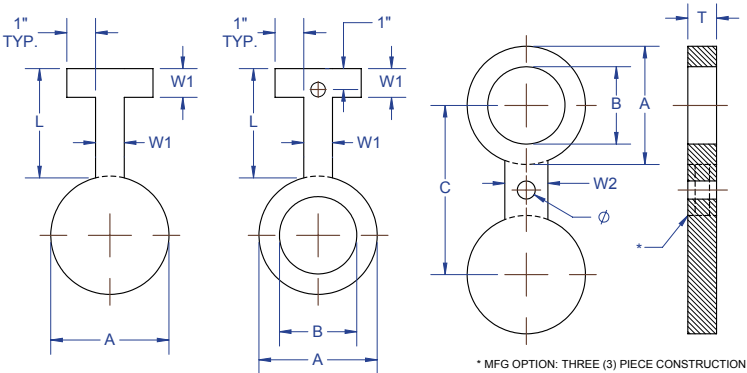

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)								WT (LBS)		
	A	B	C	T	L	W1	W2	Ø	1	1A	2
1/2"	2.38"	0.62"	3.25"	0.25"	5.00"	1.00"	1.50"	N/A	1	1	1
3/4"	2.62"	0.82"	3.50"	0.25"	5.00"	1.00"	1.62"	0.875"	1	1	1
1"	3.00"	1.05"	4.00"	0.25"	5.00"	1.00"	2.25"	1.00"	1	1	2
1 1/4"	3.38"	1.44"	4.38"	0.38"	5.00"	1.00"	2.25"	1.00"	2	2	2
1 1/2"	3.75"	1.68"	4.88"	0.38"	5.00"	1.00"	2.62"	1.125"	2	2	3
2"	5.50"	2.16"	6.50"	0.50"	5.00"	1.00"	2.25"	1.00"	5	4	7
2 1/2"	6.38"	2.64"	7.50"	0.50"	5.00"	1.00"	2.62"	1.125"	6	5	9
3"	6.50"	3.26"	7.50"	0.62"	5.00"	1.00"	2.62"	1.00"	7	6	11
4"	8.00"	4.26"	9.25"	0.75"	5.00"	1.00"	3.00"	1.25"	12	9	20
5"	9.62"	5.30"	11.00"	0.88"	5.00"	1.00"	3.38"	1.375"	20	14	32
6"	11.25"	6.36"	12.50"	1.00"	5.00"	1.00"	3.38"	1.25"	30	21	49
8"	14.00"	8.33"	15.50"	1.38"	5.00"	1.00"	3.75"	1.50"	62	41	101
10"	17.00"	10.42"	18.50"	1.62"	5.00"	1.50"	4.12"	1.50"	109	69	173
12"	19.50"	12.39"	21.00"	1.88"	5.00"	1.50"	4.12"	1.50"	163	99	257
14"	20.38"	13.62"	22.00"	2.12"	6.00"	1.50"	4.50"	1.625"	202	115	310
16"	22.50"	15.62"	24.25"	2.38"	6.00"	1.50"	4.88"	1.75"	274	145	413
18"	25.00"	17.62"	27.00"	2.62"	6.00"	1.50"	5.25"	2.00"	373	191	558
20"	27.38"	19.56"	29.50"	2.88"	6.00"	1.50"	5.25"	2.125"	488	243	724
24"	32.88"	23.50"	35.50"	3.50"	6.00"	1.50"	6.00"	2.625"	852	421	1,271


WT=Approximate Weight



SIZE	RATING/FACING	TYPE	MATERIAL	GASKET SURFACE
1/2-24	900#	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	MF=Mill Finish SF=Serrated Finish 125-250 AARH (3.2 - 6.3 Ra) X=Other

Class 1500
Raised/
Flat Face

ASME
B16.48

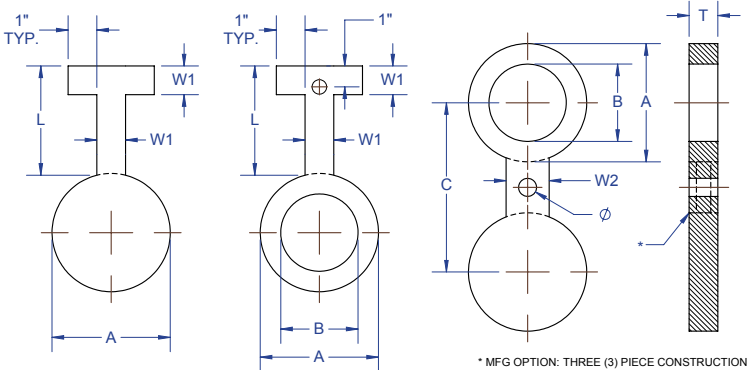

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)								WT (LBS)		
	A	B	C	T	L	W1	W2	Ø	1	1A	2
1/2"	2.38"	0.62"	3.25"	0.25"	5.00"	1.00"	1.50"	N/A	1	1	1
3/4"	2.62"	0.82"	3.50"	0.38"	5.00"	1.00"	1.62"	0.875"	2	2	2
1"	3.00"	1.05"	4.00"	0.38"	5.00"	1.00"	2.20"	1.00"	2	2	2
1 1/4"	3.38"	1.38"	4.38"	0.38"	5.00"	1.00"	2.50"	1.00"	2	2	3
1 1/2"	3.75"	1.61"	4.88"	0.50"	5.00"	1.00"	2.75"	1.125"	3	2	4
2"	5.50"	2.07"	6.50"	0.50"	5.00"	1.00"	2.75"	1.00"	5	4	7
2 1/2"	6.38"	2.47"	7.50"	0.62"	6.00"	1.00"	3.00"	1.125"	7	6	12
3"	6.75"	3.07"	8.00"	0.75"	6.00"	1.00"	3.00"	1.25"	9	8	15
4"	8.12"	4.03"	9.50"	0.88"	6.00"	1.00"	3.50"	1.375"	15	12	24
5"	9.88"	5.05"	11.50"	1.12"	6.00"	1.00"	3.50"	1.625"	27	20	45
6"	11.00"	6.06"	12.50"	1.38"	6.00"	1.00"	3.50"	1.50"	40	29	65
8"	13.75"	7.98"	15.50"	1.62"	7.00"	1.00"	4.00"	1.75"	72	49	118
10"	17.00"	10.02"	19.00"	2.00"	8.00"	1.50"	4.50"	2.00"	136	91	218
12"	20.38"	11.94"	22.50"	2.38"	8.00"	1.50"	4.50"	2.125"	228	153	371
14"	22.62"	13.12"	25.00"	2.62"	9.00"	1.50"	5.00"	2.375"	310	209	507
16"	25.12"	15.00"	27.75"	3.00"	9.00"	1.50"	5.25"	2.625"	434	283	706
18"	27.62"	16.88"	30.50"	3.38"	10.00"	1.50"	5.75"	2.875"	589	374	950
20"	29.62"	18.81"	32.75"	3.75"	10.00"	1.50"	6.00"	3.125"	750	454	1,191
24"	35.38"	22.62"	39.00"	4.38"	10.00"	1.50"	7.00"	3.625"	1,239	740	1,972


WT=Approximate Weight



SIZE	RATING/FACING	TYPE	MATERIAL	GASKET SURFACE
1/2-24	1500#	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	MF=Mill Finish SF=Serrated Finish 125-250 AARH (3.2 - 6.3 Ra) X=Other

Class 2500
Raised/
Flat Face

ASME
B16.48

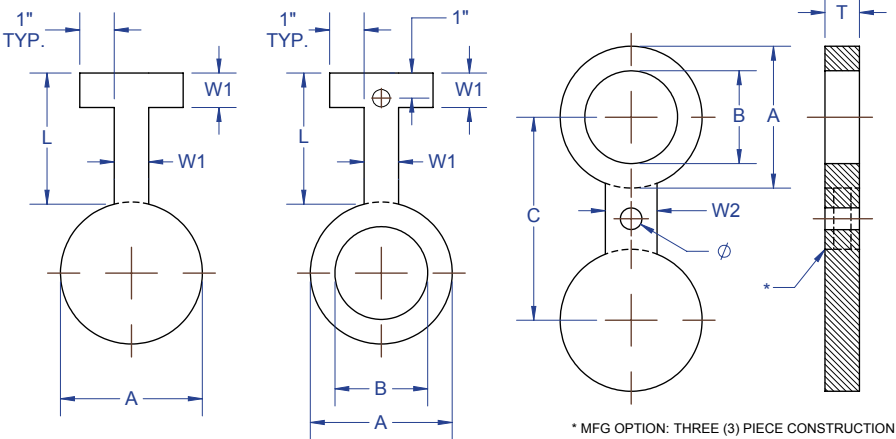

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)								WT (LBS)		
	A	B	C	T	L	W1	W2	Ø	1	1A	2
1/2"	2.62"	0.62"	3.50"	0.38"	5.00"	1.00"	1.50"	N/A	2	2	2
3/4"	2.88"	0.82"	3.75"	0.38"	5.00"	1.00"	1.62"	0.875"	2	2	2
1"	3.25"	1.05"	4.25"	0.38"	5.00"	1.00"	2.50"	1.00"	2	2	2
1 1/4"	4.00"	1.38"	5.12"	0.50"	5.00"	1.00"	2.50"	1.125"	3	3	4
1 1/2"	4.50"	1.61"	5.75"	0.62"	5.00"	1.00"	2.75"	1.25"	4	4	6
2"	5.62"	2.07"	6.75"	0.62"	5.00"	1.00"	2.75"	1.125"	6	5	9
2 1/2"	6.50"	2.47"	7.75"	0.75"	6.00"	1.00"	3.00"	1.25"	9	8	14
3"	7.62"	3.07"	9.00"	0.88"	6.00"	1.00"	3.00"	1.375"	13	11	22
4"	9.12"	4.03"	10.75"	1.12"	7.00"	1.00"	3.50"	1.625"	24	20	40
5"	10.88"	5.05"	12.75"	1.38"	7.00"	1.00"	3.50"	1.875"	39	32	68
6"	12.38"	6.06"	14.50"	1.62"	8.00"	1.50"	3.50"	2.125"	61	48	101
8"	15.12"	7.81"	17.25"	2.12"	8.00"	1.50"	4.00"	2.125"	116	87	193
10"	18.62"	9.75"	21.25"	2.62"	9.00"	1.50"	4.50"	2.625"	213	158	359
12"	21.50"	11.37"	24.38"	3.12"	9.00"	1.50"	4.50"	2.875"	334	294	565


WT=Approximate Weight



SIZE	RATING/FACING	TYPE	MATERIAL	GASKET SURFACE
1/2-12	2500#	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	MF=Mill Finish SF=Serrated Finish 125-250 AARH (3.2 - 6.3 Ra) X=Other

Class 150
Male
Octagonal
Ring Joint

ASME
B16.48

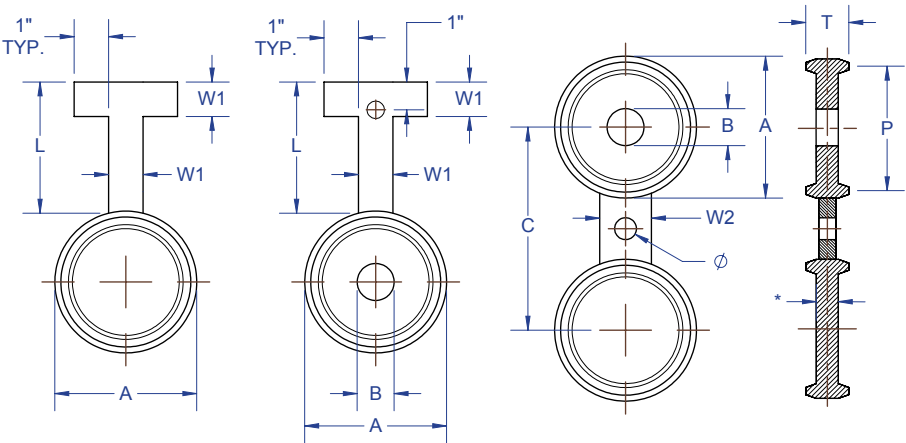

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)										R#	WT (LBS)		
	A	B	C	T	*	P	L	W1	W2	Ø		1	1A	2
1"	2.19"	1.32"	3.12"	0.75"	0.25"	1.875"	4.00"	1.00"	2.00"	0.625"	R 15	2	2	2
1 1/4"	2.56"	1.66"	3.50"	0.75"	0.25"	2.25"	4.00"	1.00"	2.00"	0.625"	R 17	2	2	2
1 1/2"	2.87"	1.90"	3.88"	0.75"	0.25"	2.562"	4.00"	1.00"	2.25"	0.625"	R 19	2	2	3
2"	3.56"	2.38"	4.75"	0.75"	0.25"	3.25"	4.00"	1.00"	2.25"	0.75"	R 22	2	2	3
2 1/2"	4.31"	2.88"	5.50"	0.88"	0.38"	4.00"	4.00"	1.00"	2.25"	0.75"	R 25	3	2	4
3"	4.81"	3.50"	6.00"	0.88"	0.38"	4.50"	4.00"	1.00"	2.25"	0.75"	R 29	3	2	5
3 1/2"	5.50"	4.00"	7.00"	0.88"	0.38"	5.188"	4.00"	1.00"	2.50"	0.75"	R 33	4	3	6
4"	6.19"	4.50"	7.50"	0.88"	0.38"	5.875"	4.00"	1.00"	2.50"	0.75"	R 36	5	3	8
5"	7.06"	5.56"	8.50"	1.00"	0.50"	6.75"	5.00"	1.00"	3.00"	0.875"	R 40	7	4	8
6"	7.94"	6.62"	9.50"	1.00"	0.50"	7.625"	5.00"	1.00"	3.25"	0.875"	R 43	9	4	12
8"	10.06"	8.62"	11.75"	1.12"	0.62"	9.75"	5.00"	1.00"	3.75"	0.875"	R 48	15	7	20
10"	12.31"	10.75"	14.25"	1.25"	0.75"	12.00"	5.00"	1.00"	4.00"	1.00"	R 52	24	9	30
12"	15.31"	12.75"	17.00"	1.38"	0.88"	15.00"	6.00"	1.50"	4.75"	1.00"	R 56	39	15	52
14"	15.94"	14.00"	18.75"	1.38"	0.88"	15.625"	6.00"	1.50"	5.00"	1.125"	R 59	44	15	57
16"	18.19"	16.00"	21.25"	1.50"	1.00"	17.875"	6.00"	1.50"	5.00"	1.125"	R 64	62	19	79
18"	20.69"	18.00"	22.75"	1.62"	1.12"	20.375"	6.00"	1.50"	5.00"	1.25"	R 68	85	26	110
20"	22.31"	20.00"	25.00"	1.62"	1.12"	22.00"	7.00"	1.50"	5.00"	1.25"	R 72	105	30	134
24"	26.81"	24.00"	29.50"	1.88"	1.38"	26.50"	7.00"	1.50"	6.00"	1.38"	R 76	170	46	216

WT=Approximate Weight R#=Ring Number




SIZE	RATING/FACING	TYPE	MATERIAL
1-24	150/MO	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 150
Female
Ring Joint

ASME
B16.48

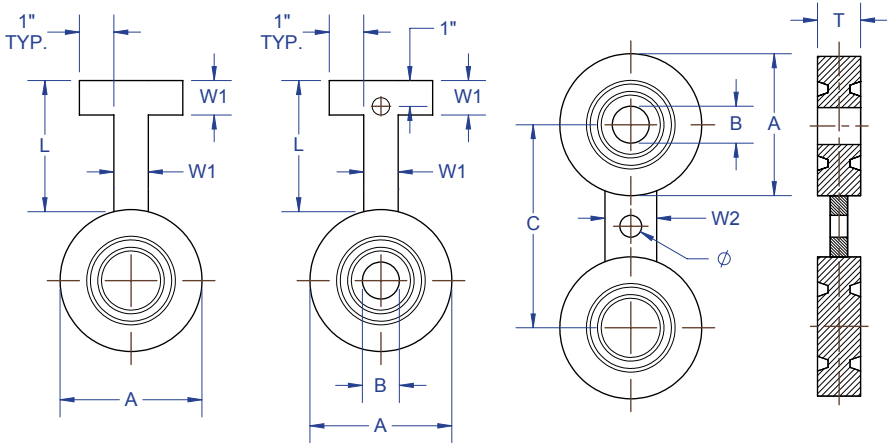

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)									R#	WT (LBS)		
	A	B	C	T	P	L	W1	W2	Ø		1	1A	2
1"	2.50"	1.32"	3.12"	0.75"	1.875"	4.00"	1.00"	2.00"	0.625"	R 15	2	1	2
1 1/4"	2.88"	1.66"	3.50"	0.75"	2.25"	4.00"	1.00"	2.00"	0.625"	R 17	3	2	3
1 1/2"	3.25"	1.90"	3.88"	0.75"	2.562"	4.00"	1.00"	2.25"	0.625"	R 19	4	3	5
2"	4.00"	2.38"	4.75"	0.75"	3.25"	4.00"	1.00"	2.25"	0.75"	R 22	5	4	7
2 1/2"	4.75"	2.88"	5.50"	0.88"	4.00"	4.00"	1.00"	2.25"	0.75"	R 25	6	4	9
3"	5.25"	3.50"	6.00"	0.88"	4.50"	4.00"	1.00"	2.25"	0.75"	R 29	7	4	10
3 1/2"	6.06"	4.00"	7.00"	0.88"	5.188"	4.00"	1.00"	2.50"	0.75"	R 33	8	5	13
4"	6.75"	4.50"	7.50"	0.88"	5.875"	4.00"	1.00"	2.50"	0.75"	R 36	9	6	15
5"	7.62"	5.56"	8.50"	1.00"	6.75"	5.00"	1.00"	2.75"	0.875"	R 40	14	7	19
6"	8.62"	6.62"	9.50"	1.00"	7.625"	5.00"	1.00"	3.25"	0.875"	R 43	17	8	23
8"	10.75"	8.62"	11.75"	1.12"	9.75"	5.00"	1.00"	3.75"	0.875"	R 48	29	11	39
10"	13.00"	10.75"	14.25"	1.25"	12.00"	5.00"	1.00"	4.00"	1.00"	R 52	47	17	60
12"	16.00"	12.75"	17.00"	1.38"	15.00"	6.00"	1.50"	4.75"	1.00"	R 56	77	30	104
14"	16.75"	14.00"	18.75"	1.38"	15.625"	6.00"	1.50"	5.00"	1.125"	R 59	88	30	114
16"	19.00"	16.00"	21.25"	1.50"	17.875"	6.00"	1.50"	5.00"	1.125"	R 64	123	38	158
18"	21.50"	18.00"	22.75"	1.62"	20.375"	6.00"	1.50"	5.00"	1.25"	R 68	170	52	220
20"	23.50"	20.00"	25.00"	1.62"	22.00"	7.00"	1.50"	5.00"	1.25"	R 72	210	60	268
24"	28.00"	24.00"	29.50"	1.88"	26.50"	7.00"	1.50"	6.00"	1.375"	R 76	340	92	431

WT=Approximate Weight R#=Ring Number




AITKEN
A DDM GLOBAL COMPANY

SIZE	RATING/FACING	TYPE	MATERIAL
1-24	150/FG	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 300
Male
Octagonal
Ring Joint

ASME
B16.48

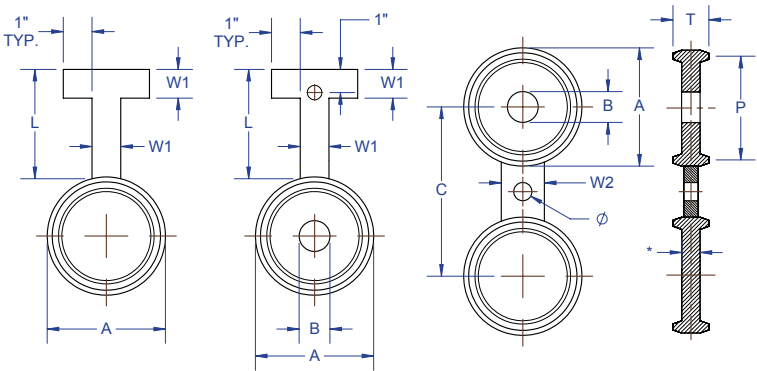

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)										R#	WT (LBS)		
	A	B	C	T	*	P	L	W1	W2	Ø		1	1A	2
1/2"	1.59"	0.84"	2.62"	0.63"	0.25"	1.344"	4.00"	1.00"	1.50"	0.625"	R 11	1	1	1
3/4"	2.00"	1.05"	3.25"	0.88"	0.38"	1.688"	4.00"	1.00"	1.75"	0.75"	R 13	2	1	2
1"	2.31"	1.32"	3.50"	0.88"	0.38"	2.00"	4.00"	1.00"	2.00"	0.75"	R 16	2	2	2
1 1/4"	2.69"	1.66"	3.88"	0.88"	0.38"	2.375"	4.00"	1.00"	2.00"	0.75"	R 18	2	2	2
1 1/2"	3.00"	1.90"	4.50"	0.88"	0.38"	2.688"	4.00"	1.00"	2.25"	0.875"	R 20	2	2	3
2"	3.69"	2.38"	5.00"	1.13"	0.50"	3.25"	4.00"	1.00"	2.25"	0.75"	R 23	3	2	3
2 1/2"	4.44"	2.88"	5.88"	1.25"	0.62"	4.00"	4.00"	1.00"	2.25"	0.875"	R 26	3	2	4
3"	5.31"	3.50"	6.62"	1.25"	0.62"	4.875"	4.00"	1.00"	2.25"	0.875"	R 31	4	3	5
3 1/2"	5.63"	4.00"	7.25"	1.38"	0.75"	5.188"	4.00"	1.00"	2.50"	0.875"	R 34	5	4	7
4"	6.31"	4.50"	7.88"	1.25"	0.62"	5.875"	5.00"	1.00"	2.50"	0.875"	R 37	6	4	9
5"	7.56"	5.56"	9.25"	1.38"	0.75"	7.125"	5.00"	1.00"	3.00"	0.875"	R 41	11	7	15
6"	8.75"	6.62"	10.62"	1.51"	0.88"	8.312"	5.00"	1.00"	3.25"	0.875"	R 45	15	9	20
8"	11.06"	8.62"	13.00"	1.63"	1.00"	10.625"	5.00"	1.00"	3.75"	1.00"	R 49	28	15	39
10"	13.19"	10.75"	15.25"	1.75"	1.12"	12.75"	5.00"	1.00"	4.00"	1.125"	R 53	42	20	62
12"	15.44"	12.75"	17.75"	2.01"	1.38"	15.00"	6.00"	1.50"	4.75"	1.25"	R 57	62	23	90
14"	16.94"	14.00"	20.25"	2.13"	1.50"	16.50"	6.00"	1.50"	5.00"	1.25"	R 61	76	31	105
16"	18.94"	16.00"	22.50"	2.25"	1.62"	18.50"	6.00"	1.50"	5.00"	1.375"	R 65	102	38	138
18"	21.44"	18.00"	24.75"	2.38"	1.75"	21.00"	7.00"	1.50"	5.00"	1.375"	R 69	140	52	192
20"	23.50"	20.00"	27.00"	2.69"	2.00"	23.00"	7.00"	1.50"	5.00"	1.375"	R 73	193	70	264
24"	27.88"	24.00"	32.00"	3.06"	2.25"	27.25"	7.00"	1.50"	6.00"	1.625"	R 77	317	108	425


WT=Approximate Weight R#=Ring Number



SIZE	RATING/FACING	TYPE	MATERIAL	NOTE:
1/2-24	300/MO	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	Groove Dimensions are per ASME B16.5, and gasket surface finish & tolerances are per ANSI B16.20

Class 300
Female
Ring Joint

ASME
B16.48

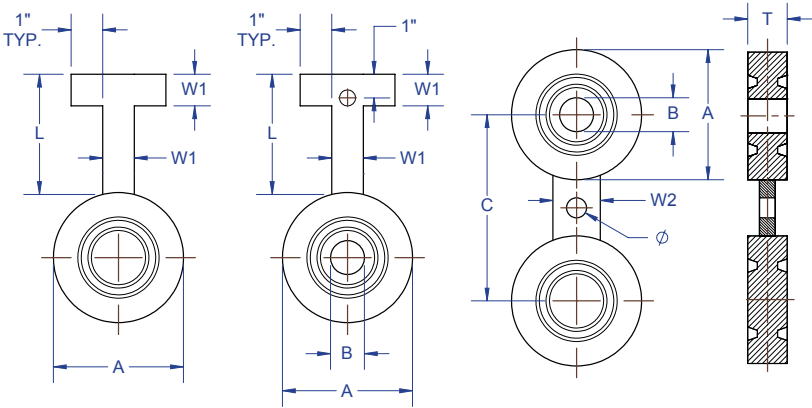

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)									R#	WT (LBS)		
	A	B	C	T	P	L	W1	W2	Ø		1	1A	2
1/2"	2.00"	0.84"	2.62"	0.62"	1.344"	4.00"	1.00"	1.50"	0.625"	R 11	1	1	1
3/4"	2.50"	1.05"	3.25"	0.75"	1.688"	4.00"	1.00"	1.75"	0.75"	R 13	2	1	2
1"	2.75"	1.32"	3.50"	0.75"	2.00"	4.00"	1.00"	2.00"	0.75"	R 16	3	2	4
1 1/4"	3.12"	1.66"	3.88"	0.88"	2.375"	4.00"	1.00"	2.00"	0.75"	R 18	3	3	5
1 1/2"	3.56"	1.90"	4.50"	0.88"	2.688"	4.00"	1.00"	2.25"	0.875"	R 20	4	3	6
2"	4.25"	2.38"	5.00"	1.00"	3.25"	4.00"	1.00"	2.25"	0.75"	R 23	5	4	8
2 1/2"	5.00"	2.88"	5.88"	1.12"	4.00"	4.00"	1.00"	2.25"	0.875"	R 26	7	5	11
3"	5.75"	3.50"	6.62"	1.12"	4.875"	4.00"	1.00"	2.25"	0.875"	R 31	9	6	14
3 1/2"	6.25"	4.00"	7.25"	1.12"	5.188"	4.00"	1.00"	2.50"	0.875"	R 34	12	8	17
4"	6.88"	4.50"	7.88"	1.25"	5.875"	5.00"	1.00"	2.50"	0.875"	R 37	14	9	21
5"	8.25"	5.56"	9.25"	1.38"	7.125"	5.00"	1.00"	2.75"	0.875"	R 41	22	13	32
6"	9.50"	6.62"	10.62"	1.38"	8.312"	5.00"	1.00"	3.25"	0.875"	R 45	29	16	43
8"	11.88"	8.62"	13.00"	1.62"	10.625"	5.00"	1.00"	3.75"	1.00"	R 49	53	27	77
10"	14.00"	10.75"	15.25"	1.75"	12.75"	5.00"	1.00"	4.00"	1.125"	R 53	82	35	113
12"	16.25"	12.75"	17.75"	2.00"	15.00"	6.00"	1.50"	4.75"	1.25"	R 57	120	48	165
14"	18.00"	14.00"	20.25"	2.12"	16.50"	6.00"	1.50"	5.00"	1.25"	R 61	151	61	210
16"	20.00"	16.00"	22.50"	2.25"	18.50"	6.00"	1.50"	5.00"	1.375"	R 65	203	75	276
18"	22.62"	18.00"	24.75"	2.38"	21.00"	7.00"	1.50"	5.00"	1.375"	R 69	280	104	383
20"	25.00"	20.00"	27.00"	2.75"	23.00"	7.00"	1.50"	5.00"	1.375"	R 73	385	140	527
24"	29.50"	24.00"	32.00"	3.12"	27.25"	7.00"	1.50"	6.00"	1.625"	R 77	633	216	849

WT=Approximate Weight R#=Ring Number




SIZE	RATING/FACING	TYPE	MATERIAL
1/2-24	300/FG	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 600
Male
Octagonal
Ring Joint

ASME
B16.48

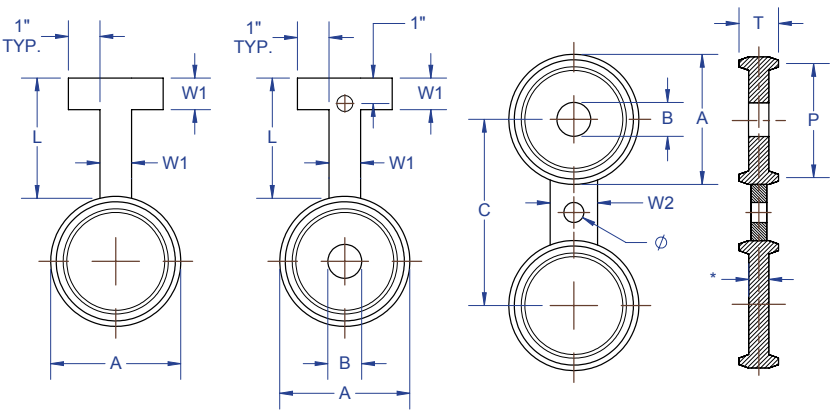

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)										R#	WT (LBS)		
	A	B	C	T	*	P	L	W1	W2	Ø		1	1A	2
1/2"	1.59"	0.84"	2.62"	0.63"	0.25"	1.344"	4.00"	1.00"	1.50"	0.625"	R 11	1	1	1
3/4"	2.00"	1.05"	3.25"	0.88"	0.38"	1.688"	4.00"	1.00"	1.75"	0.75"	R 13	1	1	1
1"	2.31"	1.32"	3.50"	0.88"	0.38"	2.00"	4.00"	1.00"	2.00"	0.75"	R 16	2	2	2
1 1/4"	2.69"	1.66"	3.88"	0.88"	0.38"	2.375"	4.00"	1.00"	2.25"	0.75"	R 18	3	2	3
1 1/2"	3.00"	1.90"	4.50"	0.88"	0.38"	2.688"	4.00"	1.00"	2.25"	0.875"	R 20	3	2	3
2"	3.69"	2.38"	5.00"	1.13"	0.50"	3.25"	4.00"	1.00"	2.00"	0.75"	R 23	3	3	4
2 1/2"	4.44"	2.88"	5.88"	1.25"	0.62"	4.00"	4.00"	1.00"	2.25"	0.875"	R 26	4	3	6
3"	5.31"	3.50"	6.62"	1.25"	0.62"	4.875"	4.00"	1.00"	2.62"	0.875"	R 31	5	4	7
3 1/2"	5.63"	4.00"	7.25"	1.38"	0.75"	5.188"	4.00"	1.00"	2.62"	1.00"	R 34	7	6	10
4"	6.31"	4.50"	8.50"	1.38"	0.75"	5.875"	5.00"	1.00"	2.88"	1.00"	R 37	9	7	14
5"	7.56"	5.56"	10.50"	1.51"	0.88"	7.125"	5.00"	1.00"	2.88"	1.125"	R 41	17	11	25
6"	8.75"	6.62"	11.50"	1.75"	1.12"	8.312"	5.00"	1.00"	2.88"	1.125"	R 45	23	15	35
8"	11.06"	8.62"	13.75"	2.01"	1.38"	10.625"	6.00"	1.00"	3.25"	1.25"	R 49	41	23	62
10"	13.19"	10.75"	17.00"	2.25"	1.62"	12.75"	6.00"	1.00"	4.75"	1.375"	R 54	71	40	112
12"	15.44"	12.75"	19.25"	2.51"	1.88"	15.00"	6.00"	1.50"	4.75"	1.375"	R 57	106	51	162
14"	16.94"	14.00"	20.75"	2.63"	2.00"	16.50"	6.00"	1.50"	4.75"	1.50"	R 61	112	58	134
16"	18.94"	16.00"	23.75"	2.88"	2.25"	18.50"	7.00"	1.50"	5.00"	1.625"	R 65	130	65	176
18"	21.44"	18.00"	25.75"	3.13"	2.50"	21.00"	7.00"	1.50"	5.25"	1.75"	R 69	184	69	251
20"	23.50"	20.00"	28.50"	3.44"	2.75"	23.00"	7.00"	1.50"	5.00"	1.75"	R 73	250	91	340
24"	27.88"	24.00"	33.00"	4.06"	3.25"	27.25"	8.00"	1.50"	6.00"	2.00"	R 77	407	139	547


WT=Approximate Weight R#=Ring Number

SIZE	RATING/FACING	TYPE	MATERIAL	NOTE:
1/2-24	600/MO	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A	Groove Dimensions are per ASME B16.5, and gasket surface finish & tolerances are per ANSI B16.20



Class 600
Female
Octagonal
Ring Joint

ASME
B16.48

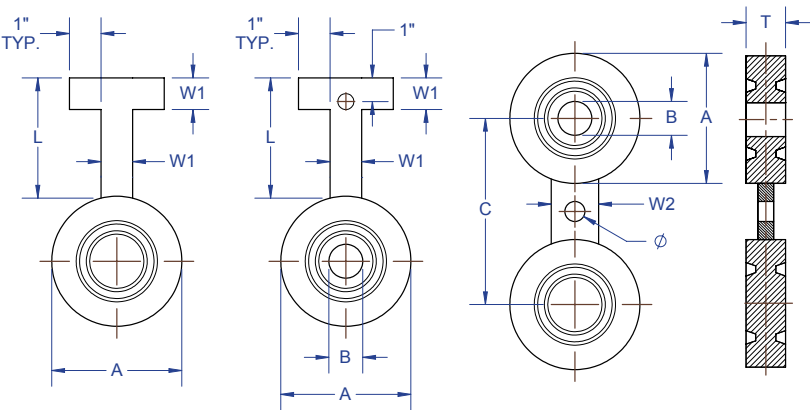

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)									R#	WT (LBS)		
	A	B	C	T	P	L	W1	W2	Ø		1	1A	2
1/2"	2.00"	0.84"	2.62"	0.75"	1.344"	4.00"	1.00"	1.50"	0.625"	R 11	1	1	1
3/4"	2.50"	1.05"	3.25"	0.88"	1.688"	4.00"	1.00"	1.75"	0.75"	R 13	1	1	1
1"	2.75"	1.32"	3.50"	0.88"	2.00"	4.00"	1.00"	2.00"	0.75"	R 16	2	1	2
1 1/4"	3.12"	1.66"	3.88"	0.88"	2.375"	4.00"	1.00"	2.00"	0.75"	R 18	3	3	4
1 1/2"	3.56"	1.90"	4.50"	0.88"	2.688"	4.00"	1.00"	2.25"	0.875"	R 20	4	3	6
2"	4.25"	2.38"	5.00"	1.12"	3.25"	4.00"	1.00"	2.25"	0.75"	R 23	6	4	9
2 1/2"	5.00"	2.88"	5.88"	1.25"	4.00"	4.00"	1.00"	2.25"	0.875"	R 26	8	6	13
3"	5.75"	3.50"	6.62"	1.25"	4.875"	4.00"	1.00"	2.25"	0.875"	R 31	11	7	16
3 1/2"	6.25"	4.00"	7.25"	1.38"	5.188"	4.00"	1.00"	2.50"	1.00"	R 34	13	9	20
4"	6.88"	4.50"	8.50"	1.38"	5.875"	5.00"	1.00"	2.50"	1.00"	R 37	16	10	24
5"	8.25"	5.56"	10.50"	1.50"	7.125"	5.00"	1.00"	2.75"	1.125"	R 41	24	15	39
6"	9.50"	6.62"	11.50"	1.75"	8.312"	5.00"	1.00"	3.25"	1.125"	R 45	36	20	53
8"	11.88"	8.62"	13.75"	2.00"	10.625"	6.00"	1.00"	3.75"	1.25"	R 49	65	32	95
10"	14.00"	10.75"	17.00"	2.25"	12.75"	6.00"	1.00"	4.00"	1.375"	R 53	98	42	137
12"	16.25"	12.75"	19.25"	2.50"	15.00"	6.00"	1.50"	4.75"	1.375"	R 57	146	58	202
14"	18.00"	14.00"	20.75"	2.62"	16.50"	6.00"	1.50"	5.00"	1.50"	R 61	165	67	229
16"	20.00"	16.00"	23.75"	2.88"	18.50"	7.00"	1.50"	5.00"	1.625"	R 65	225	83	386
18"	22.62"	18.00"	25.75"	3.12"	21.00"	7.00"	1.50"	5.00"	1.75"	R 69	367	137	502
20"	25.00"	20.00"	28.50"	3.50"	23.00"	7.00"	1.50"	5.00"	1.75"	R 73	499	182	679
24"	29.50"	24.00"	33.00"	4.12"	27.25"	8.00"	1.50"	6.00"	2.00"	R 77	814	278	1,094

WT=Approximate Weight R#=Ring Number




SIZE	RATING/FACING	TYPE	MATERIAL
1/2-24	600/FG	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 900
Male
Octagonal
Ring Joint

ASME
B16.48

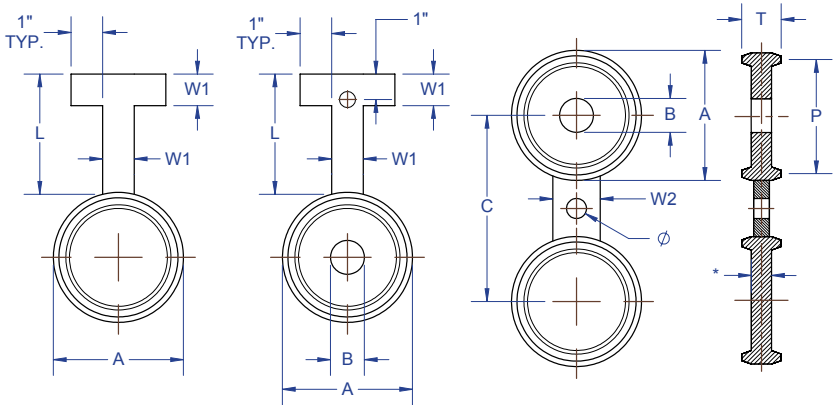

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)										R#	WT (LBS)		
	A	B	C	T	*	P	L	W1	W2	Ø		1	1A	2
1/2"	1.87"	0.84"	3.25"	0.88"	0.38"	1.562"	5.00"	1.00"	1.50"	0.875"	R 12	1	1	1
3/4"	2.06"	1.05"	3.50"	0.88"	0.38"	1.75"	5.00"	1.00"	1.75"	0.875"	R 14	1	1	1
1"	2.31"	1.32"	4.00"	0.88"	0.38"	2.00"	5.00"	1.00"	2.00"	1.00"	R 16	2	2	2
1 1/4"	2.69"	1.66"	4.38"	1.00"	0.50"	2.375"	5.00"	1.00"	2.12"	1.00"	R 18	3	2	3
1 1/2"	3.00"	1.90"	4.88"	1.00"	0.50"	2.688"	5.00"	1.00"	2.12"	1.125"	R 20	3	3	3
2"	4.19"	2.38"	6.50"	1.25"	0.62"	3.75"	5.00"	1.00"	2.00"	1.00"	R 24	3	3	4
2 1/2"	4.69"	2.88"	7.50"	1.38"	0.75"	4.25"	6.00"	1.00"	2.12"	1.125"	R 27	4	3	6
3"	5.31"	3.50"	7.50"	1.38"	0.75"	4.875"	6.00"	1.00"	2.62"	1.00"	R 31	7	6	12
4"	6.31"	4.50"	9.25"	1.63"	1.00"	5.875"	6.00"	1.00"	2.88"	1.25"	R 37	14	10	19
5"	7.56"	5.56"	11.00"	1.75"	1.12"	7.125"	6.00"	1.00"	2.88"	1.375"	R 41	23	16	33
6"	8.75"	6.62"	12.50"	1.88"	1.25"	8.312"	6.00"	1.00"	2.88"	1.25"	R 45	32	22	47
8"	11.06"	8.62"	15.50"	2.25"	1.62"	10.625"	7.00"	1.00"	3.12"	1.50"	R 49	59	38	95
10"	13.19"	10.75"	18.50"	2.51"	1.88"	12.75"	7.00"	1.00"	4.75"	1.50"	R 53	102	66	170
12"	15.44"	12.75"	21.00"	2.88"	2.25"	15.00"	7.00"	1.50"	4.75"	1.50"	R 57	157	92	250
14"	17.13"	14.00"	22.00"	3.19"	2.38"	16.50"	7.00"	1.50"	4.75"	1.625"	R 62	165	100	270
16"	19.13"	16.00"	24.25"	3.56"	2.75"	18.50"	7.00"	1.50"	5.00"	1.75"	R 66	174	120	290
18"	21.75"	18.00"	27.00"	3.94"	3.00"	21.00"	8.00"	1.50"	5.25"	2.00"	R 70	253	135	356
20"	23.75"	20.00"	29.50"	4.32"	3.38"	23.00"	8.00"	1.50"	5.00"	2.125"	R 74	323	150	449
24"	28.25"	24.00"	35.50"	5.13"	3.88"	27.25"	8.00"	1.50"	6.00"	2.625"	R 78	547	200	756

SIZE
1/2-24

RATING/FACING
900/MO

TYPE
1=Paddle Blank
1A=Paddle Spacer
2=Figure 8 Blank


MATERIAL
Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20



Class 900
Female
Ring Joint

ASME
B16.48

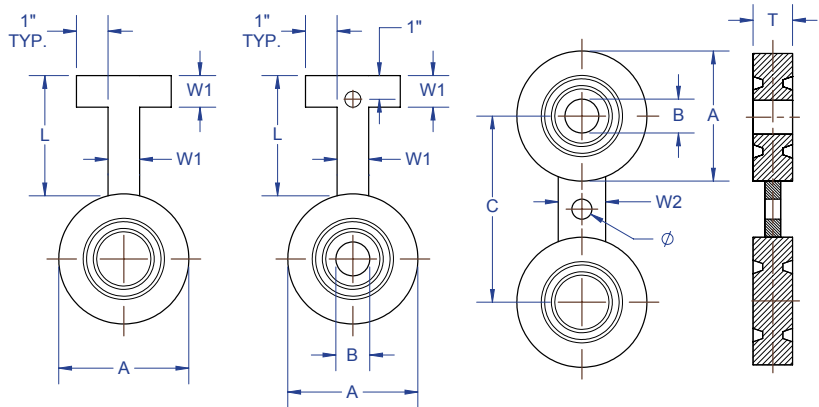

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)									R#	WT (LBS)		
	A	B	C	T	P	L	W1	W2	Ø		1	1A	2
1/2"	2.38"	0.84"	3.25"	0.88"	1.562"	5.00"	1.00"	1.50"	0.875"	R 12	1	1	1
3/4"	2.62"	1.05"	3.50"	0.88"	1.75"	5.00"	1.00"	1.75"	0.875"	R 14	2	2	2
1"	2.81"	1.32"	4.00"	0.88"	2.00"	5.00"	1.00"	2.00"	1.00"	R 16	3	3	4
1 1/4"	3.19"	1.66"	4.38"	1.00"	2.375"	5.00"	1.00"	2.00"	1.00"	R 18	4	3	5
1 1/2"	3.62"	1.90"	4.88"	1.00"	2.688"	5.00"	1.00"	2.50"	1.125"	R 20	5	4	6
2"	4.88"	2.38"	6.50"	1.25"	3.75"	5.00"	1.00"	2.00"	1.00"	R 24	8	7	13
2 1/2"	5.38"	2.88"	7.50"	1.38"	4.25"	6.00"	1.00"	2.62"	1.125"	R 27	11	8	18
3"	6.12"	3.50"	7.50"	1.38"	4.875"	6.00"	1.00"	2.62"	1.00"	R 31	13	9	21
4"	7.12"	4.50"	9.25"	1.62"	5.875"	6.00"	1.00"	2.88"	1.25"	R 37	20	13	30
5"	8.50"	5.56"	11.00"	1.75"	7.125"	6.00"	1.00"	2.88"	1.375"	R 41	32	25	45
6"	9.50"	6.62"	12.50"	1.88"	8.312"	6.00"	1.00"	2.88"	1.25"	R 45	41	22	60
8"	12.12"	8.62"	15.50"	2.25"	10.625"	7.00"	1.00"	3.12"	1.50"	R 49	77	40	112
10"	14.25"	10.75"	18.50"	2.50"	12.75"	7.00"	1.00"	4.75"	1.50"	R 53	119	53	169
12"	16.50"	12.75"	21.00"	2.88"	15.00"	7.00"	1.50"	4.75"	1.50"	R 57	178	74	249
14"	18.38"	14.00"	22.00"	3.25"	16.50"	7.00"	1.50"	4.75"	1.625"	R 62	252	108	546
16"	20.62"	16.00"	24.25"	3.62"	18.50"	7.00"	1.50"	5.00"	1.75"	R 66	347	140	484
18"	23.38"	18.00"	27.00"	4.00"	21.00"	8.00"	1.50"	5.25"	2.00"	R 70	505	208	712
20"	25.50"	20.00"	29.50"	4.38"	23.00"	8.00"	1.50"	5.00"	2.125"	R 74	646	251	898
24"	30.38"	24.00"	35.50"	5.25"	27.25"	8.00"	1.50"	5.50"	2.625"	R 78	1,094	413	1,512

WT=Approximate Weight R#=Ring Number




SIZE	RATING/FACING	TYPE	MATERIAL
1/2-24	900/FG	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 1500
Male
Octagonal
Ring Joint

ASME
B16.48

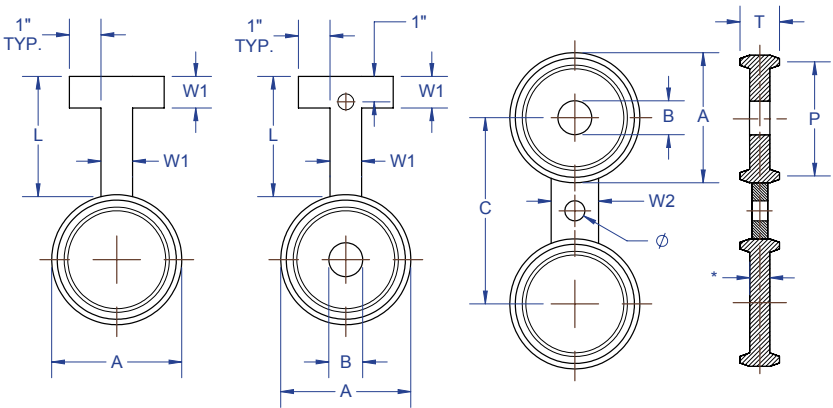

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)										R#	WT (LBS)		
	A	B	C	T	*	P	L	W1	W2	Ø		1	1A	2
1/2"	1.87"	0.84"	3.25"	0.88"	0.38"	1.562"	5.00"	1.00"	1.50"	0.875"	R 12	1	1	1
3/4"	2.06"	1.05"	3.50"	0.88"	0.38"	1.75"	5.00"	1.00"	1.75"	0.875"	R 14	1	1	2
1"	2.31"	1.32"	4.00"	1.00"	0.50"	2.00"	5.00"	1.00"	2.12"	1.00"	R 16	2	2	3
1 1/4"	2.69"	1.66"	4.38"	1.00"	0.50"	2.375"	5.00"	1.00"	2.12"	1.00"	R 18	2	2	3
1 1/2"	3.00"	1.90"	4.88"	1.12"	0.62"	2.688"	5.00"	1.00"	2.25"	1.125"	R 20	3	3	4
2"	4.19"	2.38"	6.50"	1.38"	0.75"	3.75"	5.00"	1.00"	2.12"	1.00"	R 24	5	4	8
2 1/2"	4.69"	2.88"	7.50"	1.51"	0.88"	4.25"	6.00"	1.00"	2.25"	1.125"	R 27	7	5	11
3"	5.81"	3.50"	8.00"	1.75"	1.12"	5.375"	6.00"	1.00"	2.88"	1.25"	R 35	9	7	16
4"	6.81"	4.50"	9.50"	1.88"	1.25"	6.375"	6.00"	1.00"	3.00"	1.375"	R 39	17	14	27
5"	8.06"	5.56"	11.50"	2.13"	1.50"	7.625"	6.00"	1.00"	3.00"	1.625"	R 44	24	18	44
6"	8.81"	6.62"	12.50"	2.30"	1.62"	8.312"	6.00"	1.00"	3.12"	1.50"	R 46	36	22	61
8"	11.25"	8.62"	15.50"	2.81"	2.00"	10.62"	7.00"	1.00"	3.38"	1.75"	R 50	68	41	110
10"	13.38"	10.75"	19.00"	3.31"	2.50"	12.75"	8.00"	1.00"	5.25"	2.00"	R 54	128	75	205
12"	15.88"	12.75"	22.50"	3.94"	2.88"	15.00"	8.00"	1.50"	5.25"	2.125"	R 58	210	127	340
14"	17.50"	14.00"	25.00"	4.43"	3.12"	16.50"	9.00"	1.50"	5.50"	2.375"	R 63	220	140	360
16"	19.63"	16.00"	27.75"	4.88"	3.50"	18.50"	9.00"	1.50"	5.75"	2.625"	R 67	256	155	372
18"	22.13"	18.00"	30.50"	5.26"	3.88"	21.00"	10.00"	1.50"	6.00"	2.875"	R 71	350	165	508
20"	24.25"	20.00"	32.75"	5.75"	4.25"	23.00"	10.00"	1.50"	6.50"	3.125"	R 75	456	197	657
24"	28.63"	24.00"	39.00"	6.63"	5.00"	27.25"	10.00"	1.50"	7.00"	3.625"	R 79	742	306	1,054

WT=Approximate Weight R#=Ring Number




A DDM GLOBAL COMPANY

SIZE	RATING/FACING	TYPE	MATERIAL
1/2-24	1500/MO	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 1500
Female
Ring Joint

ASME
B16.48

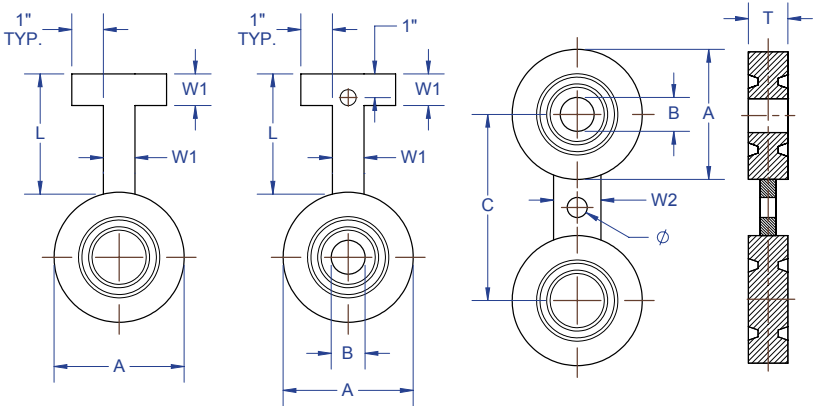

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)									R#	WT (LBS)		
	A	B	C	T	P	L	W1	W2	Ø		1	1A	2
1/2"	2.38"	0.84"	3.25"	0.88"	1.562"	5.00"	1.00"	1.50"	0.875"	R 12	1	1	1
3/4"	2.62"	1.05"	3.50"	1.00"	1.75"	5.00"	1.00"	1.75"	0.875"	R 14	2	2	2
1"	2.81"	1.32"	4.00"	1.00"	2.00"	5.00"	1.00"	2.00"	1.00"	R 16	3	3	4
1 1/4"	3.19"	1.66"	4.38"	1.00"	2.375"	5.00"	1.00"	2.12"	1.00"	R 18	4	3	5
1 1/2"	3.62"	1.90"	4.88"	1.12"	2.688"	5.00"	1.00"	2.25"	1.125"	R 20	5	4	6
2"	4.88"	2.38"	6.50"	1.38"	3.75"	5.00"	1.00"	2.12"	1.00"	R 24	8	7	13
2 1/2"	5.38"	2.88"	7.50"	1.50"	4.25"	6.00"	1.00"	2.25"	1.125"	R 27	11	8	18
3"	6.62"	3.50"	8.00"	1.75"	5.375"	6.00"	1.00"	2.88"	1.25"	R 35	19	14	31
4"	7.62"	4.50"	9.50"	1.88"	6.375"	6.00"	1.00"	3.00"	1.375"	R 39	28	19	43
5"	9.00"	5.56"	11.50"	2.12"	7.625"	6.00"	1.00"	3.00"	1.625"	R 44	41	25	61
6"	9.75"	6.62"	12.50"	2.38"	8.312"	6.00"	1.00"	3.12"	1.50"	R 46	53	30	79
8"	12.50"	8.62"	15.50"	2.88"	10.625"	7.00"	1.00"	3.38"	1.75"	R 50	106	57	159
10"	14.62"	10.75"	19.00"	3.25"	12.75"	8.00"	1.50"	5.25"	2.00"	R 54	161	76	236
12"	17.25"	12.75"	22.50"	4.00"	15.00"	8.00"	1.50"	5.25"	2.125"	R 58	268	124	390
14"	19.25"	14.00"	25.00"	4.38"	16.50"	9.00"	1.50"	5.50"	2.375"	R 63	365	174	539
16"	21.50"	16.00"	27.75"	4.88"	18.50"	9.00"	1.50"	5.75"	2.625"	R 67	511	230	744
18"	24.12"	18.00"	30.50"	5.25"	21.00"	10.00"	1.50"	6.00"	2.875"	R 71	700	312	1,015
20"	26.50"	20.00"	32.75"	5.62"	23.00"	10.00"	1.50"	6.50"	3.125"	R 75	912	394	1,313
24"	31.25"	24.00"	39.00"	6.62"	27.25"	10.00"	1.50"	7.00"	3.625"	R 79	1,484	611	2,108

WT=Approximate Weight R#=Ring Number




SIZE	RATING/FACING	TYPE	MATERIAL
1/2-24	1500/FG	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 2500
Male
Octagonal
Ring Joint

ASME
B16.48

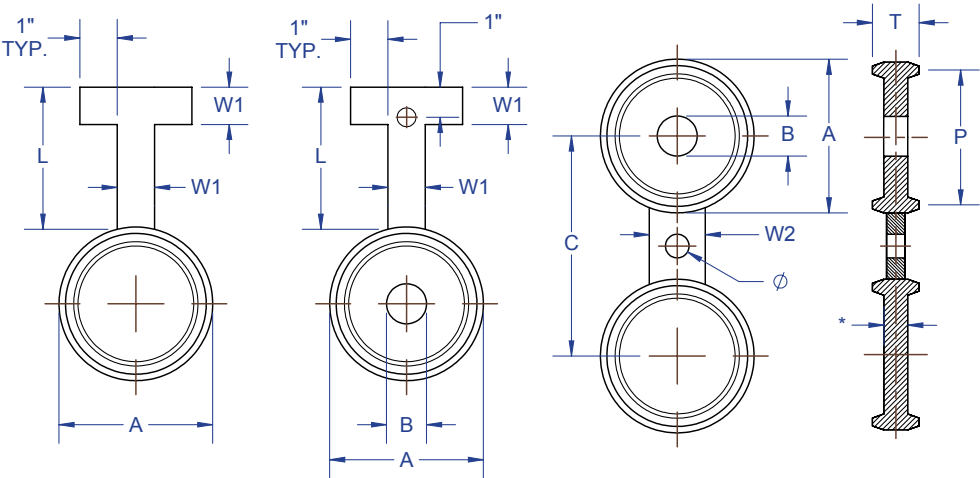

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)										R#	WT (LBS)		
	A	B	C	T	*	P	L	W1	W2	Ø		1	1A	2
1/2"	2.00"	0.84"	3.50"	1.00"	0.50"	1.688"	5.00"	1.00"	1.62"	0.875"	R 13	1	1	1
3/4"	2.31"	1.05"	3.75"	1.12"	0.62"	2.00"	5.00"	1.00"	1.88"	0.875"	R 16	2	2	2
1"	2.69"	1.32"	4.25"	1.12"	0.62"	2.375"	5.00"	1.00"	2.12"	1.00"	R 18	3	3	4
1 1/4"	3.28"	1.66"	5.12"	1.38"	0.75"	2.844"	5.00"	1.00"	2.12"	1.125"	R 21	3	3	4
1 1/2"	3.69"	1.90"	5.75"	1.51"	0.88"	3.25"	5.00"	1.00"	2.38"	1.25"	R 23	4	4	6
2"	4.44"	2.38"	6.75"	1.63"	1.00"	4.00"	5.00"	1.00"	2.25"	1.125"	R 26	8	6	12
2 1/2"	4.88"	2.88"	7.75"	1.81"	1.12"	4.375"	6.00"	1.00"	2.38"	1.25"	R 28	10	7	17
3"	5.50"	3.50"	9.00"	1.94"	1.25"	5.00"	6.00"	1.00"	3.00"	1.375"	R 32	15	11	24
4"	6.81"	4.50"	10.75"	2.31"	1.50"	6.188"	7.00"	1.00"	3.25"	1.625"	R 38	25	16	41
5"	8.25"	5.56"	12.75"	2.82"	1.88"	7.50"	7.00"	1.00"	3.50"	1.875"	R 42	41	26	66
6"	9.75"	6.62"	14.50"	3.19"	2.25"	9.00"	8.00"	1.00"	3.75"	2.125"	R 47	57	35	91
8"	11.88"	8.62"	17.25"	3.81"	2.75"	11.00"	8.00"	1.00"	3.75"	2.125"	R 51	102	63	165
10"	14.63"	10.75"	21.25"	4.63"	3.25"	13.50"	9.00"	1.50"	3.75"	2.625"	R 55	190	115	306
12"	17.25"	12.75"	24.38"	5.38"	3.88"	16.00"	9.00"	1.50"	6.00"	2.875"	R 60	312	187	507

WT=Approximate Weight R#=Ring Number




SIZE	RATING/FACING	TYPE	MATERIAL
1/2-12	2500/MO	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

Class 2500
Female
Ring Joint

ASME
B16.48

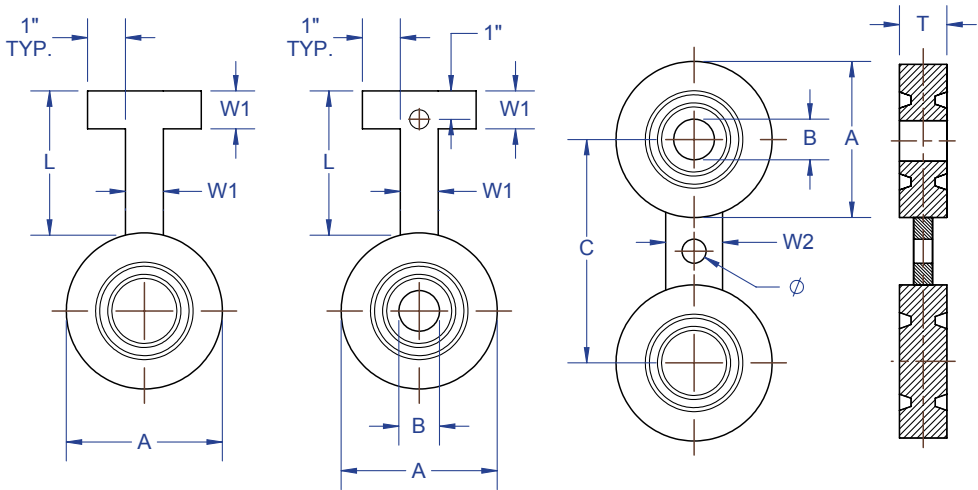

+ CUSTOM SIZES AND RATINGS AVAILABLE UPON REQUEST

SIZE	DIMENSIONAL DATA (IN)									R#	WT (LBS)		
	A	B	C	T	P	L	W1	W2	Ø		1	1A	2
1/2"	2.56"	0.84"	3.50"	1.00"	1.688"	5.00"	1.00"	1.50"	0.875"	R 13	2	2	4
3/4"	2.88"	1.05"	3.75"	1.12"	2.00"	5.00"	1.00"	1.75"	0.875"	R 16	3	3	5
1"	3.25"	1.32"	4.25"	1.12"	2.375"	5.00"	1.00"	2.12"	1.00"	R 18	4	4	6
1 1/4"	4.00"	1.66"	5.12"	1.38"	2.844"	5.00"	1.00"	2.12"	1.125"	R 21	7	5	10
1 1/2"	4.50"	1.90"	5.75"	1.50"	3.25"	5.00"	1.00"	2.38"	1.25"	R 23	8	7	14
2"	5.25"	2.38"	6.75"	1.62"	4.00"	5.00"	1.00"	2.25"	1.125"	R 26	13	11	20
2 1/2"	5.88"	2.88"	7.75"	1.88"	4.375"	6.00"	1.00"	2.38"	1.25"	R 28	17	13	27
3"	6.62"	3.50"	9.00"	2.00"	5.00"	6.00"	1.00"	3.00"	1.375"	R 32	22	17	35
4"	8.00"	4.50"	10.75"	2.50"	6.188"	7.00"	1.00"	3.25"	1.625"	R 38	37	26	60
5"	9.50"	5.56"	12.75"	2.88"	7.50"	7.00"	1.00"	3.50"	1.875"	R 42	64	43	104
6"	11.00"	6.62"	14.50"	3.25"	9.00"	8.00"	1.00"	3.75"	2.125"	R 47	91	59	147
8"	13.38"	8.62"	17.25"	3.88"	11.00"	8.00"	1.00"	3.75"	2.125"	R 51	158	94	249
10"	16.75"	10.75"	21.25"	4.62"	13.50"	9.00"	1.50"	3.58"	2.625"	R 55	300	178	476
12"	19.50"	12.75"	24.38"	5.25"	16.00"	9.00"	1.50"	6.00"	2.875"	R 60	453	261	714

WT=Approximate Weight R#=Ring Number



AITKEN
A DDM GLOBAL COMPANY

SIZE	RATING/FACING	TYPE	MATERIAL
1/2-12	2500/FG	1=Paddle Blank 1A=Paddle Spacer 2=Figure 8 Blank	Per ASME B16.5, Table 1-A

NOTE:
Groove Dimensions are per
ASME B16.5, and gasket surface finish
& tolerances are per ANSI B16.20

REFERENCE INFO

Standard English Conversion Tables

LENGTH

CONVERT FROM	CONVERT TO	MULTIPLY BY
Inches	Feet	0.083
Inches	Yards	0.028
Feet	Inches	12
Feet	Yards	0.333
Feet	Miles	0.000
Yards	Feet	3
Yards	Miles	0.001

AREA

CONVERT FROM	CONVERT TO	MULTIPLY BY
Sq inches	Sq feet	0.007
Sq inches	Sq yards	0.001
Sq feet	Sq inches	144
Sq feet	Sq yards	0.111
Sq yards	Sq inches	1,296
Sq yards	Sq feet	9
Sq yards	Acres	0.000
Acres	Sq feet	43,560

VOLUME

CONVERT FROM	CONVERT TO	MULTIPLY BY
Cu inches	Cu feet	0.001
Cu inches	Cu yards	0.000
Cu inches	US gal	0.004
Cu feet	Cu inches	1,728
Cu feet	Cu yards	0.037
Cu feet	US gal	7.481
Cu yards	Cu inches	46,656
Cu yards	Cu feet	27

WEIGHT

CONVERT FROM	CONVERT TO	MULTIPLY BY
Grains	Ounces	0.002
Ounces	Grains	437.5
Ounces	Pounds	0.063
Pounds	Ounces	16
Pounds	US tons	0.001
Pounds	Longtons	0.000
US tons	Pounds	2,000
Long tons	Pounds	2,240

SHEET INFORMATION

GAUGE	THICKNESS (IN)	WT/SQFT (LBS)
10	0.135	5.625
11	0.120	5
12	0.105	4.375
14	0.075	3
16	0.060	2.5
18	0.048	2
20	0.036	2
22	0.030	1
24	0.024	1

STEEL PLATE WEIGHT

THICKNESS (IN)	WT/SQFT (LBS)
3/16	7.66
1/4	10.21
5/16	12.76
3/8	15.32
1/2	20.42
5/8	25.53
3/4	30.63
7/8	35.74
1	40.84

DRILL SIZE FOR PIPE TAPS

NOMINAL PIPE SZ (IN)	TAP DRILL SZ (IN)	DECIMAL EQUIVALENT	NO OF THREADS PER IN	THREAD ENGAGEMENT
1/8	11/32	0.344	27	1/4
1/4	7/16	0.438	18	3/8
3/8	37/64	0.578	18	3/8
1/2	23/32	0.719	14	1/2
3/4	59/64	0.922	14	9/16
1	1 5/32	1.156	11.5	11/16
1 1/4	1 1/2	1.5	11.5	11/16
1 1/2	1 47/64	1.734	11.5	11/16



Standard English Conversion Tables

CONVERSION OF LIQUID MEASURES AND WEIGHTS

TO CONVERT CONVERT FROM	US GALLON	IMPERIAL GALLON	US PINT	US LB *H ₂ O	US CUBIC FT	US CUBIC IN	LITER	CUBIC METER
U.S. gallon	1	0.833	8	8.337	0.134	231	3.785	0.004
Imperial gallon	1.201	1	9.608	10	0.161	277.42	4.546	0.005
U.S. pint	0.125	0.104	1	1.042	0.017	28.875	0.473	0.000
U.S. pound *H ₂ O	0.120	0.1	0.960	1	0.016	27.708	0.454	0.000
U.S. cubic foot	7.481	6.229	59.844	62.365	1	1728	28.317	0.028
U.S. cubic inch	0.004	0.004	0.035	0.036	0.001	1	0.016	0.000
Liter	0.264	0.220	2.113	2.202	0.035	61.025	1	0.001
Cubic meter	264.17	219.969	2113.34	2202	35.314	61023.38	999.972	1

Water (H₂O) @ 60°F (15.6°C) / 1 Barrel = 42 Gallons (Petroleum measure)

CONVERSIONS OF PRESSURE AND HEAD

TO CONVERT CONVERT FROM	LB/IN ²	LB/FT ²	KG/CM ²	KG/M ²	IN *H ₂ O	FT *H ₂ O	IN **MERCURY	MM **MERCURY	†BAR	†MPA
Lb/In ²	1	144	0.070	703.07	27.728	2.311	2.306	51.715	0.069	0.007
Lb/Ft ²	0.007	1	0.000	4.882	0.193	0.016	0.014	0.359	0.000	0.000
kg/cm ²	14.223	2048.155	1	10000	394.38	32.865	28.959	735.559	0.981	0.098
kg/m ²	0.001	0.205	0.000	1	0.039	0.003	0.003	0.074	0.000	0.000
In. *H ₂ O	0.036	5.197	0.003	25.375	1	0.083	0.073	1.865	0.002	0.000
Ft. *H ₂ O	0.433	62.321	0.030	304.275	12	1	0.881	22.381	0.030	0.003
In. **Mercury	0.491	70.726	0.035	345.316	13.619	1.135	1	25.400	0.034	0.003
Mm **Mercury	0.019	2.785	0.001	13.595	0.536	0.045	0.039	1	0.001	0.000
†Bar	14.504	2088.55	1.020	10197.2	402.156	33.513	29.53	750.062	1	0.1
†Mpa	145.038	20885.5	10.197	101972	4021.56	335.13	295.3	7500.62	10	1

Water (H₂O) @ 68°F (20°C) / **Mercury @ 32°F (0°C) / †Mpa (megapascal) = 10 Bar

CONVERSION OF FLOW RATES

TO CONVERT CONVERT FROM	US GAL/MIN	IMP GAL/MIN	US MILLION GAL/DAY	CU FT/SEC (SEC-FT)	CU METERS / HOUR	LITERS / SEC	BARRELS (42 GAL/MIN)	BARRELS (42 GAL/DAY)
U.S. gal/min	1	0.833	0.001	0.002	0.227	0.063	0.024	34.286
Imp gal/min	1.201	1	0.002	0.003	0.273	0.076	0.029	41.176
US Million gal/day	694.4	578.25	1	1.547	157.7	43.8	16.53	23810
Cu ft/sec	448.83	373.7	0.646	1	101.9	28.32	10.686	15388
Cu m/sec	15852	13200	22.83	3535	3600	1000	377.4	-
Cu m/min	264.2	220	0.380	0.589	60	16.667	6.29	9058
Cu m/hr	4.403	3.67	0.006	0.009	1	0.278	0.105	151
Liters/sec	15.85	13.2	0.023	0.035	3.6	1	0.377	543.3
Liters/min	0.264	0.22	0.000	0.001	0.06	0.017	0.006	9.058
Barrels (42 gal)/min	42	34.97	0.061	0.094	9.538	2.65	1	1440
Barrels (42 gal)/day	0.029	0.024	0.000	0.000	0.007	0.002	0.001	1

To use above conversion charts, locate the unit to be converted in the left hand column. Then follow the conversion factors across the row for the desired conversion unit. Use this factor to multiply with your numerical value to convert. Example: Convert 5 psi to inches of water. From the Conversion of Pressure and Head Chart, 5 (psi) x 2.7.7276 (Conversion factor) = 138.638 inches of water.

SI Units and Conversion Tables

LENGTH

CONVERT FROM	CONVERT TO	SI SYMBOL	MULTIPLY BY
Feet	Meter	m	0.030
Inch	Millimeter	mm	25.4
Microinches	Micrometer	μm	0.025
Statute miles	Kilometer	km	1.609

VOLUME

CONVERT FROM	CONVERT TO	SI SYMBOL	MULTIPLY BY
Cu inches	Cu millimeter	mm ³	16387
Cu inches	Cu centimeter	cm ³	16.387
Cu inches	Cu meter	m ³	0.000
Cu feet	Cu meter	m ³	0.028
Fluid ounce	Milliliter	mL	29.57
Quarts (US)	Liter	L	0.946
Gallons (US)	Liter	L	3.785

PRESSURE

CONVERT FROM	CONVERT TO	SI SYMBOL	MULTIPLY BY
lbs/in2	Pascal	Pa	6,895
lbs/in2	Kilopascal	kPa	6.895
lbs/in2	Megapascal	MPa	0.007
lbs/in2	Bar	Bar	0.069
Bar	Kilopascal	kPa	100
Millibar	Pascal	Pa	100

AREA

CONVERT FROM	CONVERT TO	SI SYMBOL	MULTIPLY BY
Sq inches	Sq millimeter	mm ²	645.163
Sq inches	Sq centimeter	cm ²	6.452
Sq inches	Sq meter	m ²	0.001
Sq feet	Sq meter	m ²	0.093
Acres	Hectare	ha	0.405

MASS

CONVERT FROM	CONVERT TO	SI SYMBOL	MULTIPLY BY
Pounds	Kilogram	kg	0.454
Ton (short)	Metric ton	t	0.907
Ton (long)	Metric ton	t	1.016

VELOCITY

CONVERT FROM	CONVERT TO	SI SYMBOL	MULTIPLY BY
Feet/Second	Meter/Second	m/s	0.305
Feet/Second	cm/sec	cm/sec	30.48
Feet/Minute	Meter/Second	m/s	0.005
Miles/Hour	Kilometer/Hour	km/h	1.609

Conversion Temperature Tables

CONVERSION TEMPERATURE TABLE

°C	°F		°C	°F		°C	°F		°C	°F		°C	°F	
-73.3	-100	-148	-3.3	26	78.8	21.1	70	158	110	230	446	354	670	1238
-67.8	-90	-130	-2.8	27	80.6	21.7	71	159.8	115	240	464	360	680	1256
-62.2	-80	-112	-2.2	28	82.4	22.2	72	161.6	121	250	482	365	690	1274
-59.5	-75	-103	-1.7	29	84.2	22.8	73	163.4	127	260	500	371	700	1292
-56.7	-70	-94	-1.1	30	86	23.3	74	165.2	132	270	518	376	710	1310
-53.9	-65	-85	-0.6	31	87.8	23.9	75	167	138	280	536	382	720	1328
-51.1	-60	-76	0	32	89.6	24.4	76	168.8	143	290	554	387	730	1346
-48.4	-55	-67	0.6	33	91.4	25	77	170.6	149	300	572	393	740	1364
-45.6	-50	-58	1.1	34	93.2	25.6	78	172.4	154	310	590	399	750	1382
-42.8	-45	-49	1.7	35	95	26.1	79	174.2	160	320	608	404	760	1400
-40	-40	-40	2.2	36	96.8	26.7	80	176	165	330	626	410	770	1418
-37.2	-35	-31	2.8	37	98.6	27.2	81	177.8	171	340	644	415	780	1436
-34.4	-30	-22	3.3	38	100.4	27.8	82	179.6	177	350	662	421	790	1454
-31.6	-25	-13	3.9	39	102.4	28.3	83	181.4	182	360	680	426	800	1472
-28.8	-20	-4	4.4	40	104	28.9	84	183.2	188	370	698	432	810	1490
-26.1	-15	5	5	41	105.8	29.4	85	185	193	380	716	438	820	1508
-23.3	-10	14	5.6	42	107.6	30	86	186.8	199	390	734	443	830	1526
-20.6	-5	23	6.1	43	109.4	30.6	87	188.6	204	400	752	449	840	1544
-17.8	0	32	6.7	44	111.2	31.1	88	190.4	210	410	770	454	850	1562
-17.2	1	33.8	7.2	45	113	31.7	89	192.2	215	420	788	460	860	1580
-16.7	2	35.6	7.8	46	114.8	32.2	90	194	221	430	806	465	870	1598
-16.1	3	37.4	8.3	47	116.6	32.8	91	195.8	226	440	824	471	880	1616
-15.6	4	39.2	8.9	48	118.4	33.3	92	197.6	232	450	842	476	890	1634
-15	5	41	9.4	49	120.2	33.9	93	199.4	238	460	860	482	900	1652
-14.4	6	42.8	10	50	122	34.4	94	201.2	243	470	878	487	910	1670
-13.9	7	44.6	10.6	51	123.8	35	95	203	249	480	896	493	920	1688
-13.3	8	46.4	11.1	52	125.6	35.6	96	204.8	254	490	914	498	930	1706
-12.8	9	48.2	11.7	53	127.4	36.1	97	206.6	260	500	932	504	940	1724
-12.2	10	50	12.2	54	129.2	36.7	98	208.4	265	510	950	510	950	1742
-11.7	11	51.8	12.8	55	131	37.2	99	210.2	271	520	968	515	960	1760
-11.1	12	53.6	13.3	56	132.8	37.8	100	212	276	530	986	520	970	1778
-10.6	13	55.4	13.9	57	134.6	43	110	230	282	540	1004	526	980	1796
-10	14	57.2	14.4	58	136.4	49	120	248	288	550	1022	532	990	1814
-9.4	15	59	15	59	138.2	54	130	266	293	560	1040	538	1000	1832
-8.9	16	60.8	15.6	60	140	60	140	284	299	570	1058	565	1050	1922
-8.3	17	62.6	16.1	61	141.8	65	150	302	304	580	1076	593	1100	2012
-7.8	18	64.4	16.7	62	143.6	71	160	320	310	590	1094	620	1150	2102
-7.2	19	66.2	17.2	63	145.4	76	170	338	315	600	1112	648	1200	2192
-6.7	20	68	17.8	64	147.2	83	180	356	321	610	1130	675	1250	2282
-6.1	21	69.8	18.3	65	149	88	190	374	326	620	1148	704	1300	2372
-5.6	22	71.6	18.9	66	150.8	93	200	392	332	630	1166	734	1350	2462
-5	23	73.4	19.4	67	152.6	99	210	410	338	640	1184	760	1400	2552
-4.4	24	75.2	20	68	154.4	100	212	413	343	650	1202	787	1450	2642
-3.9	25	77	20.6	69	156.2	104	220	428	349	660	1220	815	1500	2732

Example how to use table: Convert 70 degrees Fahrenheit to centigrade. Find your value (70) in the bold letters. To the left, under the column °C, is your conversion for centigrade. Answer: 70°F = 21.1 °C Note, for converting centigrade to Fahrenheit the same procedure would be used, except you would go to the right hand column for degrees Fahrenheit. Therefore, 70 degrees centigrade would equal to 158 degrees Fahrenheit.

Specifications

MATERIAL SPECIFICATIONS

P-NO./GROUP NO.	NOMINAL STEEL DESIGNATION	FORGINGS (FLANGES, COUPLINGS, WELDOLETS, ETC)	WROUGHT FITTINGS (ELBOWS, REDUCERS, TEES, WELD CAPS, ETC)	PIPE	PLATE	REMARKS
1/1	Carbon	SA-105	SA-234-WPB	SA-106-B	SA-516-70 or SA-36	SA-36 for Non-pressure retaining parts
		SA-350-LF2	SA-420-WPL6	SA-333 Gr. 6	SA-516-70	Cold Temperature Service
4/1	1Cr - 1/2Mo	SA-182-F12	SA-234-WP12	SA-335-P12	SA-387-12	Alloy Steel
	1 1/4Cr - 1/2Mo	SA-182-F11	SA-234-WP11	SA-335-P11	SA-387-11	-
5A/1	2 1/4Cr - 1/2Mo	SA-182-F22	SA-234-WP22	SA-335-P22	SA-387-22	Alloy Steel
5B/1	5Cr - 1/2Mo	SA-185-F5	SA-234-WP5	SA-335-P5	SA-387-5	Alloy Steel
	9Cr - 1 Mo	SA-182-F9	SA-234-WP9	SA-335-P9	SA-387-9	-
8/1	18Cr - 8Ni	SA-182-F304	SA-403-WP304	SA-312-TP304	SA-240-304	Stainless Steel
	18Cr - 8Ni	SA-182-F304H	SA-403-WP304H	SA-312-TP304H	SA-240-304H	-
	16Cr - 12Ni - 2Mo	SA-182-F316	SA-403-WP316	SA-312-TP316	SA-240-316	Stainless Steel
	16Cr - 12Ni - 2Mo	SA-182-F316H	SA-403-WP316H	SA-312-TP316H	SA-240-316H	-
	18Cr - 8 Ni	SA-182-F304L	SA-403-WP304L	SA-312-TP304L	SA-240-304L	Low Carbon Stainless Steel
	16Cr - 12Ni - 2Mo	SA-182-F316L	SA-403-WP316L	SA-312-TP316L	SA-240-316L	Low Carbon Stainless Steel
43	67Ni - 30Cu	SB164		SB-165	SB-127	Money
45	35Ni-35Fe-20Cr-Cb	SB-462	SB-366	SB-729	SB-463	Alloy 20

BOLTING MATERIAL SPECIFICATION

MATERIAL	SPECIFICATION	DESCRIPTION	REMARKS
Carbon Steel	SA-193-B7	Stud	-
Carbon Steel	SA-194-2H	Nut	-
Carbon Steel	SA-193-B7M	Stud	Nace
Carbon Steel	SA-194-2HM	Nut	Nace
Carbon Steel	SA-320-L7	Stud	Low Temp. Service (-150°F)
Carbon Steel	SA-194-4	Nut	Low Temp. Service (-150°F)
304 Stainless Steel	SA-193-B8	Stud	-
304 Stainless Steel	SA-194-8	Nut	-
316 Stainless Steel	SA-193-B8M	Stud	-
316 Stainless Steel	SA-194-8M	Nut	-

Gravity and Density

EQUIVALENTS OF API GRAVITY, BAUME GRAVITY, SPECIFIC GRAVITY, AND WEIGHT DENSITY AT 60°F / 60°F

API GRAVITY	BAUME GRAVITY	SPECIFIC GRAVITY(G)	WT DENSITY (LB/FT³)	API GRAVITY	BAUME GRAVITY	SPECIFIC GRAVITY(G)	WT DENSITY (LB/FT³)
6	4.099	1.029	64.18	54	53.53	0.763	47.57
8	2.049	1.014	63.26	56	55.51	0.755	47.07
10	10.00	1.000	62.37	58	57.49	0.747	46.57
12	11.98	0.986	61.50	60	59.47	0.739	46.08
14	13.96	0.973	60.65	62	61.45	0.731	45.61
16	15.94	0.959	59.83	64	63.43	0.724	45.14
18	17.92	0.947	59.03	66	65.41	0.717	44.68
20	19.89	0.934	58.25	68	67.39	0.709	44.23
22	21.87	0.922	57.87	70	69.36	0.702	43.79
24	23.85	0.910	56.75	72	71.34	0.695	43.36
26	25.83	0.898	56.03	74	73.32	0.689	42.94
28	27.81	0.887	55.32	76	75.30	0.682	42.53
30	29.79	0.876	54.64	78	77.28	0.675	42.12
32	31.77	0.865	53.97	80	79.26	0.669	41.72
34	33.75	0.855	53.32	82	81.24	0.663	41.33
36	35.72	0.845	52.69	84	83.22	0.657	40.95
38	37.70	0.835	52.06	86	85.19	0.651	40.57
40	39.68	0.825	51.46	88	87.17	0.645	40.20
42	41.66	0.816	50.86	90	89.15	0.639	39.84
44	43.64	0.806	50.28	92	91.13	0.633	39.48
46	45.62	0.797	49.72	94	93.11	0.628	39.13
48	50.60	0.788	49.16	96	95.09	0.622	38.79
50	50.58	0.780	48.62	98	97.07	0.617	38.45
52	51.55	0.771	48.09	100	99.05	0.611	38.12

The above table is based on the weight of oil @ 60°F in air to the same weight of water @ 60°F in air.
The relation of Degrees Baume' or API to Specific Gravity is expressed by the following formulas:

For liquids lighter than water
Degrees Baume' = 140/G - 130
Degrees A.P.I. = 141.5/G - 131.5

For liquids heavier than water:
Degrees Baume' = 145 - 145/G



Hardness Conversion

BRINELL	BRINELL	ROCKWELL C	ROCKWELL A	ROCKWELL B	SHORE SCIEROSCOPE
10mm Ball 3000 kg Dia of impression		Brale 150 kg Load	Brale 60 kg Load	1/4" Brale 100 kg Load	
-	-	80	92	-	-
-	-	79	91.5	-	-
-	-	78	91	-	-
-	-	77	90.5	-	-
-	-	76	90	-	-
-	-	75	89.5	-	-
-	-	74	89	-	-
-	-	73	88.5	-	-
-	-	72	88	-	-
-	-	71	87	-	-
2.2	780	70	86.5	-	106
-	760	69	86	-	103
2.25	745	68	85.5	-	100
-	725	67	85	-	97
2.3	712	66	84.5	-	95
-	697	65	84	-	93
2.35	682	64	83.5	-	91
-	668	63	83	-	89
2.4	653	62	82.5	-	87
-	640	61	81.5	-	86
2.45	627	60	81	-	84
-	615	59	80.5	-	82
2.5	601	58	80	-	81
-	590	57	79.5	-	80
2.55	578	56	79	-	78
-	567	55	78.5	-	77
2.6	555	54	78	120	75
-	545	53	77.5	120	74
2.65	534	52	77	119	72
2.7	514	51	76.5	119	70
2.75	495	50	76	118	67
2.8	477	49	75.5	117	65
-	470	48	74.5	117	64
2.85	461	47	74	116	63
2.9	444	46	73.5	115	61
2.95	429	45	73	115	59
3	415	44	72.5	114	57
-	408	43	72	114	56
3.05	401	42	71.5	113	55
3.1	388	41	71	112	54
3.15	375	40	70.5	111	52
3.2	363	39	70	111	51
3.25	352	38	69.5	110	49
-	346	37	69	110	48
3.3	341	36	68.5	109	47

BRINELL	BRINELL	ROCKWELL C	ROCKWELL A	ROCKWELL B	SHORE SCIEROSCOPE
10mm Ball 3000 kg Dia of impression		Brale 150 kg Load	Brale 60 kg Load	1/4" Brale 100 kg Load	
3.35	331	35	68	109	46
3.4	321	34	67.5	108	45
3.45	311	33	67	108	44
3.5	302	32	66.5	107	43
3.55	293	31	66	106	42
3.6	285	30	65.5	105	40
3.65	277	29	65	104	39
3.7	269	28	64.5	104	38
3.75	262	27	64	103	38
-	258	26	63.5	102	37
3.8	255	25	63	102	37
3.85	248	24	62.5	101	36
3.9	241	23	62	101	35
-	238	22	61.5	100	34
3.95	235	21	61	99	34
4	229	20	60	98	33
4.05	223	-	59.5	97	32
4.1	217	-	59	96	31
4.15	212	-	58	95	31
4.2	207	-	57.5	94	30
4.25	202	-	57	93	30
4.3	197	-	56.5	92	29
4.35	192	-	56	91	28
4.4	187	-	55.5	90	28
4.45	183	-	55	89	27
4.5	179	-	54	88	27
4.55	174	-	53.5	87	26
4.6	170	-	53	86	26
4.65	166	-	52.5	85	25
4.7	163	-	52	84	25
4.75	159	-	51	83	24
4.8	156	-	50.5	82	24
4.85	153	-	50	81	23
4.9	149	-	49.5	80	23
4.95	146	-	49	79	22
5	143	-	48.5	78	22
5.05	140	-	48	77	21
5.1	137	-	47	76	21
5.15	134	-	46.5	75	21
5.15	134	-	46	74	21
5.2	131	-	45.5	73	20
5.2	131	-	45	72	20
5.25	128	-	44.5	71	20
5.3	126	-	44	70	20
-	-	-	-	-	-



Pipe Dimensions & Weights

NOMINAL PIPE SIZE	METRIC PIPE SIZE	OD (IN)	LEGEND	5S	5	10S	10	20	30	STD & 40S	40	60	XH & 80S	80	100	120	140	160	XXH
1/8	6	0.41	WT	-	0.035	0.049	0.049	-	0.057	0.068	0.068	-	0.095	0.095	-	-	-	-	-
			ID	-	0.335	0.307	0.307	-	0.291	0.269	0.269	-	0.215	0.215	-	-	-	-	-
			LBS/FT	-	0.138	0.19	0.19	-		0.24	0.24	-	0.31	0.31	-	-	-	-	-
1/4	8	W	WT	-	0.049	0.065	0.065	-	0.073	0.088	0.088	-	0.119	0.119	-	-	-	-	-
			ID	-	0.442	0.41	0.41	-	0.364	0.364	0.364	-	0.302	0.302	-	-	-	-	-
			LBS/FT	-	0.257	0.33	0.33	-	0.36	0.42	0.42	-	0.54	0.54	-	-	-	-	-
3/8	10	0.68	WT	-	0.049	0.065	0.065	-	0.073	0.091	0.091	-	0.126	0.126	-	-	-	-	-
			ID	-	0.577	0.545	0.545	-	0.529	0.493	0.493	-	0.423	0.423	-	-	-	-	-
			LBS/FT	-	0.328	0.42	0.42	-	0.47	0.57	0.57	-	0.74	0.74	-	-	-	-	-
1/2	15	0.84	WT	0.065	0.065	0.083	0.083	-	0.95	0.109	0.109	-	0.147	0.147	-	-	-	0.188	0.294
			ID	0.71	0.71	0.674	0.674	-	0.65	0.622	0.622	-	0.546	0.546	-	-	-	0.464	0.252
			LBS/FT	0.54	0.54	0.67	0.67	-	0.76	0.85	0.85	-	1.09	1.09	-	-	-	1.31	1.71
3/4	20	1.05	WT	0.065	0.065	0.083	0.083	-	0.095	0.113	0.113	-	0.154	0.154	-	-	-	0.219	0.308
			ID	0.92	0.92	0.884	0.884	-	0.86	0.824	0.824	-	0.742	0.742	-	-	-	0.612	0.434
			LBS/FT	0.69	0.69	0.86	0.86	-	0.97	1.13	1.13	-	1.47	1.47	-	-	-	1.94	2.44
1	25	1.32	WT	0.065	0.065	0.109	0.109	-	0.114	0.133	0.133	-	0.179	0.179	-	-	-	0.25	0.358
			ID	1.25	1.25	1.097	1.097	-	1.087	1.049	1.049	-	0.957	0.957	-	-	-	0.815	0.599
			LBS/FT	0.87	0.87	1.4	1.4	-	1.46	1.68	1.68	-	2.17	2.17	-	-	-	2.84	3.66
1-1/4	32	1.66	WT	0.065	0.065	0.109	0.109	-	0.117	0.14	0.14	-	0.191	0.191	-	-	-	0.25	0.382
			ID	1.53	1.53	1.442	1.442	-	1.426	1.38	1.38	-	1.278	1.278	-	-	-	1.16	0.896
			LBS/FT	1.11	1.11	1.81	1.81	-	1.93	2.27	2.27	-	3	3	-	-	-	3.76	5.21
1-1/2	40	1.90	WT	0.065	0.065	0.109	0.109	-	0.125	0.145	0.145	-	2	2	-	-	-	0.281	0.4
			ID	1.77	1.77	1.682	1.682	-	1.65	1.61	1.61	-	1.5	1.5	-	-	-	1.338	1.1
			LBS/FT	1.28	1.28	2.09	2.09	-	2.37	2.72	2.72	-	3.63	3.63	-	-	-	4.86	6.41
2	50	2.38	WT	0.065	0.065	0.109	0.109	-	0.125	0.154	0.154	-	0.218	0.218	-	-	-	0.344	0.436
			ID	2.245	2.245	2.157	2.157	-	2.125	2.067	2.067	-	1.939	1.939	-	-	-	1.687	1.503
			LBS/FT	1.61	1.61	2.64	2.64	-	3	3.65	3.65	-	5.02	5.02	-	-	-	7.46	9.03
2-1/2	65	2.88	WT	0.083	0.083	0.12	0.12	-	0.188	0.203	0.203	-	0.276	0.276	-	-	-	0.375	0.552
			ID	2.709	2.709	2.755	2.755	-	2.499	2.469	2.469	-	2.323	2.323	-	-	-	2.125	1.771
			LBS/FT	2.48	2.48	3.53	3.53	-	5.4	5.79	5.79	-	7.66	7.66	-	-	-	10.01	13.69
3	80	3.50	WT	0.083	0.083	0.12	0.12	-	0.188	0.216	0.216	-	0.3	0.3	-	-	-	0.438	0.6
			ID	3.334	3.334	3.26	3.26	-	3.124	3.068	3.068	-	2.9	2.9	-	-	-	2.624	2.3
			LBS/FT	3.03	3.03	4.33	4.33	-	6.65	7.58	7.58	-	10.25	10.25	-	-	-	14.32	18.58
3-1/2	90	4.00	WT	0.083	0.083	0.12	0.12	-	0.188	0.226	0.226	-	0.381	0.381	-	-	-	0.438	0.6
			ID	3.334	3.334	3.26	3.26	-	3.124	3.068	3.068	-	2.9	2.9	-	-	-	2.624	2.3
			LBS/FT	3.03	3.03	4.33	4.33	-	6.65	7.58	7.58	-	10.25	10.25	-	-	-	14.32	18.58
4	100	4.50	WT	0.083	0.083	0.12	0.12	-	0.188	0.237	0.237	-	0.337	0.337	-	0.438	-	0.531	0.674
			ID	4.334	4.334	4.26	4.26	-	4.124	4.026	4.026	-	3.826	3.826	-	3.624	-	3.438	3.152
			LBS/FT	3.92	3.92	5.61	5.61	-	8.66	10.79	10.79	-	14.98	14.98	-	19	-	22.51	27.54
4-1/2	120	5.00	WT	-	-	-	-	-	-	0.247	0.247	-	0.355	0.355	-	-	-	-	0.71
			ID	-	-	-	-	-	-	4.506	4.506	-	4.29	4.29	-	-	-	-	3.58
			LBS/FT	-	-	-	-	-	-	12.53	12.53	-	17.61	17.61	-	-	-	-	32.53



Pipe Dimensions & Weights

NOMINAL PIPE SIZE	METRIC PIPE SIZE	OD (IN)	LEGEND	5S	5	10S	10	20	30	STD & 40S	40	60	XH & 80S	80	100	120	140	160	XXH
5	125	5.56	WT	0.109	0.109	0.134	0.134	-	-	0.258	0.258	-	0.375	0.375	-	0.5	-	0.625	0.75
			ID	5.345	5.345	5.295	5.295	-	-	5.047	5.047	-	4.813	4.813	-	4.563	-	4.313	4.063
			LBS/FT	6.36	6.36	7.77	7.77	-	-	14.62	14.62	-	20.78	20.78	-	27.04	-	32.96	38.55
6	150	6.63	WT	0.109	0.109	0.134	0.134	-	-	0.28	0.28	-	0.432	0.432	-	0.562	-	0.719	0.864
			ID	6.407	6.407	6.357	6.357	-	-	6.065	6.065	-	5.761	5.761	-	5.501	-	5.187	4.897
			LBS/FT	7.6	7.6	9.29	9.29	-	-	18.97	18.97	-	28.57	28.57	-	36.39	-	45.35	53.16
7	180	7.63	WT	-	-	-	-	-	-	0.301	0.301	-	0.5	0.5	-	-	-	-	0.875
			ID	-	-	-	-	-	-	7.023	7.023	-	6.625	6.625	-	-	-	-	5.875
			LBS/FT	-	-	-	-	-	-	23.57	23.57	-	38.05	38.05	-	-	-	-	63.08
8	200	8.63	WT	0.109	0.109	0.148	0.148	0.25	0.277	0.322	0.322	0.406	0.5	0.5	0.594	0.719	0.812	0.906	0.875
			ID	8.407	8.407	8.329	8.329	8.125	8.071	7.981	7.981	7.813	7.625	7.625	7.437	7.187	7.001	6.813	2.875
			LBS/FT	9.93	9.93	13.4	13.4	22.36	24.7	28.55	28.55	35.64	43.39	43.39	50.95	60.71	67.76	74.69	72.42
9	225	9.63	WT	-	-	-	-	-	-	0.342	0.342	-	0.5	0.5	-	-	-	-	-
			ID	-	-	-	-	-	-	8.941	8.941	-	8.625	8.625	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	33.9	33.9	-	48.72	48.72	-	-	-	-	-
10	250	10.75	WT	0.134	0.134	0.165	0.165	0.25	0.307	0.365	0.365	0.5	0.5	0.594	0.719	0.844	1	1.125	1
			ID	10.482	10.482	10.42	10.42	10.25	10.136	10.02	10.02	9.75	9.75	9.562	9.312	9.062	8.75	8.5	8.75
			LBS/FT	15.19	15.19	18.65	18.65	28.04	34.24	40.48	40.48	54.74	54.74	64.43	77.03	89.29	104.13	115.64	104.13
11	275	11.75	WT	-	-	-	-	-	-	0.375	0.375	-	0.5	0.5	-	-	-	-	-
			ID	-	-	-	-	-	-	11	11	-	10.75	10.75	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	45.55	45.55	-	60.07	60.07	-	-	-	-	-
12	300	12.75	WT	0.156	0.165	0.18	0.18	0.25	0.33	0.375	0.406	0.562	0.5	0.688	0.844	1	1.125	1.312	1
			ID	12.438	14.42	12.39	12.39	12.25	12.09	12	11.938	11.626	11.75	11.374	11.062	11.75	10.5	10.126	11.75
			LBS/FT	20.98	22.18	24.17	24.17	33.38	43.77	49.56	53.52	73.15	65.42	88.63	107.32	125.49	139.67	160.27	125.49
14	350	14.00	WT	0.156	0.156	0.188	0.25	0.312	0.375	0.375	0.438	0.594	0.5	0.75	0.938	1.094	1.25	1.406	-
			ID	13.688	13.688	13.624	13.5	13.376	13.25	13.25	13.124	12.812	13	12.5	12.124	11.812	11.5	11.188	-
			LBS/FT	23.07	23.07	27.73	36.71	45.61	54.57	54.57	63.44	85.05	72.09	106.13	194.96	150.79	170.21	189.11	-
16	400	16.00	WT	0.165	0.165	0.188	0.25	0.312	0.375	0.375	0.5	0.656	0.5	0.844	1.031	1.219	1.438	1.594	-
			ID	15.67	15.67	15.624	15.5	15.376	15.25	15.25	15	14.688	15	14.312	13.938	13.562	13.124	12.812	-
			LBS/FT	27.9	27.9	31.75	42.05	51.27	93.27	93.27	82.77	107.5	82.77	136.61	164.82	192.43	223.64	245.25	-
18	450	18.00	WT	0.165	0.165	0.188	0.25	0.312	0.438	0.375	0.562	0.75	0.5	0.938	1.156	1.375	1.562	1.781	-
			ID	17.67	17.67	17.624	17.5	17.376	17.124	17.25	16.876	16.5	17	16.124	15.688	15.25	14.876	14.438	-
			LBS/FT	31.43	31.43	35.76	47.39	58.94	82.15	70.59	104.67	138.17	93.45	170.92	207.96	244.14	274.22	308.5	-
20	500	20.00	WT	0.188	0.188	0.218	0.25	0.375	0.5	0.375	0.594	0.812	0.5	1.031	1.281	1.5	1.75	1.969	-
			ID	19.624	19.624	19.564	19.5	19.25	19	19.25	18.812	18.376	19	17.938	17.438	17	16.5	16.062	-
			LBS/FT	39.78	39.78	46.27	52.73	78.6	104.13	78.6	123.11	166.4	104.13	208.87	256.1	296.37	341.09	379.17	-
22	550	22.00	WT	0.188	0.188	0.218	0.25	0.375	0.5	0.375	-	0.875	0.5	1.125	1.375	1.625	1.875	2.215	-
			ID	21.624	21.624	21.564	21.5	21.25	21	21.25	-	20.25	21	19.75	19.25	18.75	18.25	17.75	-
			LBS/FT	43.8	43.8	50.94	58.07	86.61	114.81	86.61	-	197.41	114.81	250.81	302.88	353.61	403	451.06	-
24	600	24.00	WT	0.218	0.218	0.25	0.25	0.375	0.562	0.375	0.688	0.969	0.5	1.219	1.531	1.812	2.062	2.344	-
			ID	23.564	23.564	23.5	23.5	23.25	22.876	23.25	22.624	22.062	23	21.562	20.938	20.376	19.876	19.312	-
			LBS/FT	55.37	55.37	63.41	63.41	94.62	140.68	94.62	171.29	238.35	125.49	296.58	367.39	429.39	483.12	542.13	-



Pipe
Dimensions
& Weights

NOMINAL PIPE SIZE	METRIC PIPE SIZE	OD (IN)	LEGEND	5S	5	10S	10	20	30	STD & 40S	40	60	XH & 80S	80	100	120	140	160	XXH
26	650	26.00	WT	-	-	-	0.312	0.5	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	25.376	25	-	25.25	-	-	25	-	-	-	-	-	-
			LBS/FT	-	-	-	85.6	136.17	-	102.63	-	-	136.17	-	-	-	-	-	-
28	700	28.00	WT	-	-	-	0.312	0.5	0.625	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	27.376	27	26.75	27.25	-	-	27	-	-	-	-	-	-
			LBS/FT	-	-	-	92.26	146.85	182.73	110.64	-	-	146.85	-	-	-	-	-	-
30	750	30.00	WT	0.25	0.25	0.312	0.312	0.5	0.625	0.375	-	-	0.5	-	-	-	-	-	-
			ID	29.5	29.5	29.376	29.376	29	29.75	29.25	-	-	29	-	-	-	-	-	-
			LBS/FT	79.43	79.43	98.93	98.93	157.53	196.08	118.62	-	-	157.53	-	-	-	-	-	-
32	800	32.00	WT	-	-	-	0.312	0.5	0.625	0.375	0.688	-	0.5	-	-	-	-	-	-
			ID	-	-	-	31.376	31	30.75	31.25	30.624	-	31	-	-	-	-	-	-
			LBS/FT	-	-	-	105.59	168.21	209.43	126.66	230.08	-	168.21	-	-	-	-	-	-
34	850	34.00	WT	-	-	-	0.312	0.5	0.625	0.375	0.688	-	0.5	-	-	-	-	-	-
			ID	-	-	-	33.376	33	32.75	33.25	32.624	-	33	-	-	-	-	-	-
			LBS/FT	-	-	-	112.25	178.89	222.78	134.67	244.77	-	178.89	-	-	-	-	-	-
36	900	36.00	WT	-	-	-	0.312	0.5	0.625	0.375	0.75	-	0.5	-	-	-	-	-	-
			ID	-	-	-	35.376	35	34.75	35.25	34.5	-	35	-	-	-	-	-	-
			LBS/FT	-	-	-	118.92	189.57	236.13	142.68	382.35	-	189.57	-	-	-	-	-	-
38	950	38.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	37.25	-	-	-	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	150.82	-	-	200.43	-	-	-	-	-	-
40	1000	40.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	39.25	-	-	39	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	158.84	-	-	211.12	-	-	-	-	-	-
42	1050	42.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	41.25	-	-	41	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	166.86	-	-	221.81	-	-	-	-	-	-
44	1100	44.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	43.25	-	-	43	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	174.88	-	-	232.5	-	-	-	-	-	-
46	1150	46.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	45.25	-	-	45	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	182.89	-	-	243.19	-	-	-	-	-	-
48	1200	48.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	47.25	-	-	47	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	190.91	-	-	253.88	-	-	-	-	-	-
54	1350	54.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	53.25	-	-	53	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	215	-	-	286	-	-	-	-	-	-
60	1500	60.00	WT	-	-	-	-	-	-	0.375	-	-	0.5	-	-	-	-	-	-
			ID	-	-	-	-	-	-	59.25	-	-	59	-	-	-	-	-	-
			LBS/FT	-	-	-	-	-	-	239	-	-	318	-	-	-	-	-	-



**Add Aitken to your AML
and minimize downtime**



A DBM GLOBAL COMPANY

AITKENMFG.COM
SALES@AITKENMFG.COM
O: (281) 441-5438
F: (713) 699-5186

4920 Airline Drive
Houston, Texas 77022